

GAM RUN 22-014: IRION COUNTY WATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Nick Lamkey, GIT and Ian Jones, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Modeling Department
512-475-1788/512-463-6641
January 23, 2023



I. Jones
1/23/2023

This page is intentionally blank

GAM RUN 22-014: IRION COUNTY WATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Nick Lamkey, GIT and Ian Jones, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Modeling Department
512-475-1788/512-463-6641
January 23, 2023

EXECUTIVE SUMMARY:

Texas State Water Code, Section 36.1071, Subsection (h) (Texas Water Code, 2011), states that, in developing its groundwater management plan, a groundwater conservation district shall use groundwater availability modeling information provided by the Executive Administrator of the Texas Water Development Board (TWDB) in conjunction with any available site-specific information provided by the district for review and comment to the Executive Administrator.

The TWDB provides data and information to the Irion County Water Conservation District in two parts. Part 1 is the Estimated Historical Water Use/State Water Plan dataset report, which will be provided to you separately by the TWDB Groundwater Technical Assistance Department. Please direct questions about the water data report to Mr. Stephen Allen at 512-463-7317 or stephen.allen@twdb.texas.gov. Part 2 is the required groundwater availability modeling information, which includes:

1. the annual amount of recharge from precipitation, if any, to the groundwater resources within the district;
2. for each aquifer within the district, the annual volume of water that discharges from the aquifer to springs and any surface-water bodies, including lakes, streams, and rivers; and
3. the annual volume of flow into and out of the district within each aquifer and between aquifers in the district.

The groundwater management plan for the Irion County Water Conservation District should be adopted by the district on or before March 22, 2023 and submitted to the executive administrator of the TWDB on or before April 21, 2023. The current management plan for the Irion County Water Conservation District expires on June 20, 2023.

This analysis used version 1.01 of the groundwater availability model for the High Plains Aquifer System (Deeds and Jigmond, 2015), version 1.01 of the groundwater availability model for the Edwards-Trinity (Plateau) Aquifer (Anaya and Jones, 2009), and version 1.01 of the groundwater availability model for the Lipan Aquifer (Beach and others, 2004), to estimate the management plan information for the aquifers within the Irion County Water Conservation District.

This report replaces the results of GAM Run 17-013 (Boghici, 2017). Values may differ from the previous report as a result of routine updates to the spatial grid file used to define county, groundwater conservation district, and aquifer boundaries, which can impact the calculated water budget values. Additionally, the approach used for analyzing model results is reviewed during each update and may have been refined to better delineate groundwater flows. Tables 1 through 3 summarize the groundwater availability model data required by statute. Figures 1, 3, and 5 show the areas of the models from which the values in the Tables were extracted. Figures 2, 4, and 6 provide a generalized diagram of the groundwater flow components provided in Tables 1 through 3, respectively. Full water budgets for each aquifer within the district are provided in Appendix A. These budgets are included to assist Irion County Water Conservation District in analyzing the effects of pumping and recharge on the aquifers within the district. If, after review of the figures, the Irion County Water Conservation District determines that the district boundaries used in the assessment do not reflect current conditions, please notify the TWDB at your earliest convenience.

METHODS:

In accordance with the provisions of the Texas State Water Code, Section 36.1071, Subsection (h), the groundwater availability models for the High Plains Aquifer System, the Edwards-Trinity (Plateau) and Pecos Valley aquifers, and the Lipan Aquifer were used for this analysis. Water budgets were extracted for each year of the historical model periods (1980 through 2012 for the Dockum Aquifer, 1981 through 2000 for the Edwards-Trinity (Plateau) Aquifer, 1980 through 1998 for the Lipan Aquifer) using ZONEBUDGET Version 3.01 (Harbaugh, 2009). The average annual water budget values for recharge, surface-water outflow, groundwater inflow to the district, groundwater outflow from the district, and groundwater flow between aquifers within the district are summarized in this report.

PARAMETERS AND ASSUMPTIONS:

Dockum Aquifer

- We used version 1.01 of the groundwater availability model for the High Plains Aquifer System to analyze the Dockum Aquifer. See Deeds and others (2015) and Deeds and Jigmond (2015) for assumptions and limitations of the model.
- The groundwater availability model for the High Plains Aquifer System contains the following four layers:
 - Layer 1 represents the Ogallala Aquifer,
 - Layer 2 represents the Rita Blanca, Edwards-Trinity (High Plains), and Edwards-Trinity (Plateau) aquifers where present,
 - Layer 3 represents the upper portion of the Dockum Aquifer and equivalent units, and
 - Layer 4 represents the lower portion of the Dockum Aquifer and equivalent units.
- Water budget values for the district were determined only for the Dockum Aquifer (Layers 3 and 4).
- The MODFLOW-NWT Drain (DRN) package was used to simulate flow to springs, escarpments, and draws and the MODFLOW-NWT River (RIV) package was used to simulate rivers, general head boundaries, and reservoirs within the district.
- This model was run using MODFLOW-NWT (Niswonger and others, 2011).

Edwards-Trinity (Plateau) Aquifer

- We used version 1.01 of the groundwater availability model for the Edwards-Trinity (Plateau) and Pecos Valley aquifers to analyze the Edwards-Trinity (Plateau) Aquifer. See Anaya and Jones (2009) for assumptions and limitations of the model.
- The groundwater availability model for the Edwards-Trinity (Plateau) and Pecos Valley aquifers contains the following two layers within Irion County Water Conservation District:

- Layer 1: the Edwards Group and equivalent limestone hydrostratigraphic units of the Edwards-Trinity (Plateau) Aquifer, and
 - Layer 2: the undifferentiated Trinity Group hydrostratigraphic units or equivalent units of the Edwards-Trinity (Plateau) Aquifer.
- An individual water budget for the district was determined for the Edwards-Trinity (Plateau) Aquifer (Layers 1 and 2, combined). The Pecos Valley Aquifer does not occur within the Irion County Water Conservation District and therefore no groundwater budget values are included for it in this report.
 - Water budget terms were averaged for the period 1981 through 2000 (stress periods 2 through 21)
 - The MODFLOW General-Head Boundary (GHB) package was used to simulate cross-formational flow between the Edwards-Trinity (Plateau) Aquifer and adjacent major aquifers (the Pecos Valley, Ogallala, and the Edwards (Balcones Fault Zone) aquifers), and to underlying minor aquifers (Anaya and Jones, 2009).
 - Seeps and springs were simulated with the MODFLOW Drain (DRN) package and streams were simulated with the MODFLOW Streamflow-Routing (SFR) package.
 - The model was run with MODFLOW-96 (Harbaugh and McDonald, 1996).

Lipan Aquifer

- We used version 1.01 of the groundwater availability model for the Lipan Aquifer to analyze the Lipan Aquifer. See Beach and others (2004) for assumptions and limitations of the model. The model extent does not cover the entire Lipan Aquifer within the boundary of the Irion County Water Conservation District.
- The groundwater availability model contains one layer with a constant thickness of 400 feet. The layer represents portions of the Quaternary Leona Formation, underlying Permian units, adjacent Permian units, and the Edwards-Trinity (Plateau) Aquifer.
- The MODFLOW General-Head boundary (GHB) package was used to model the western boundary condition between the Lipan Aquifer and the Edwards-Trinity (Plateau) Aquifer within Irion County Water Conservation District.

- Water budget terms were averaged for the period 1980 through 1998 (stress periods 2 through 20). The last stress period representing the year 1999 was not included because of incorrect pumping values.
- The model was run with MODFLOW-96 (Harbaugh and McDonald, 1996).

RESULTS:

A groundwater budget summarizes the amount of water entering and leaving the aquifer according to the groundwater availability model. Selected groundwater budget components listed below were extracted from the groundwater availability model results for the Edwards-Trinity (Plateau) and Pecos Valley aquifers, for the Lipan Aquifer, and the Dockum Aquifer of the High Plains Aquifer System located within the Irion County Water Conservation District and averaged over the historical calibration period, as shown in Tables 1 through 3.

1. Precipitation recharge—the areally distributed recharge sourced from precipitation falling on the outcrop areas of the aquifers (where the aquifer is exposed at land surface) within the district.
2. Surface-water outflow—the total water discharging from the aquifer (outflow) to surface-water features such as streams, reservoirs, and springs.
3. Flow into and out of district—the lateral flow within the aquifer between the district and adjacent counties.
4. Flow between aquifers—the net vertical flow between the aquifer and adjacent aquifers or confining units. This flow is controlled by the relative water levels in each aquifer and aquifer properties of each aquifer or confining unit that define the amount of leakage that occurs.


The information needed for the district's management plan is summarized in Tables 1 through 3. Figures 2, 4, and 6 provide a generalized diagram of the groundwater flow components provided in Tables 1 through 3. Full water budgets for each aquifer within the district are provided in Appendix A. These budgets are included to assist Irion County Water Conservation District in analyzing the effects of pumping and recharge on the aquifers within the district.

It is important to note that sub-regional water budgets are not exact. This is due to the size of the model cells and the approach used to extract data from the model. To avoid double accounting, a model cell that straddles a political boundary, such as a district or county

boundary, is assigned to one side of the boundary based on the location of the centroid of the model cell. For example, if a cell contains two counties, the cell is assigned to the county where the centroid of the cell is located.


TABLE 1: SUMMARIZED INFORMATION FOR THE DOCKUM AQUIFER THAT IS NEEDED FOR THE IRION COUNTY WATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Dockum Aquifer	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Dockum Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Dockum Aquifer	152
Estimated annual volume of flow out of the district within each aquifer in the district	Dockum Aquifer	18
Estimated net annual volume of flow between each aquifer in the district	From Dockum Aquifer to Edwards-Trinity (Plateau) Aquifer	164

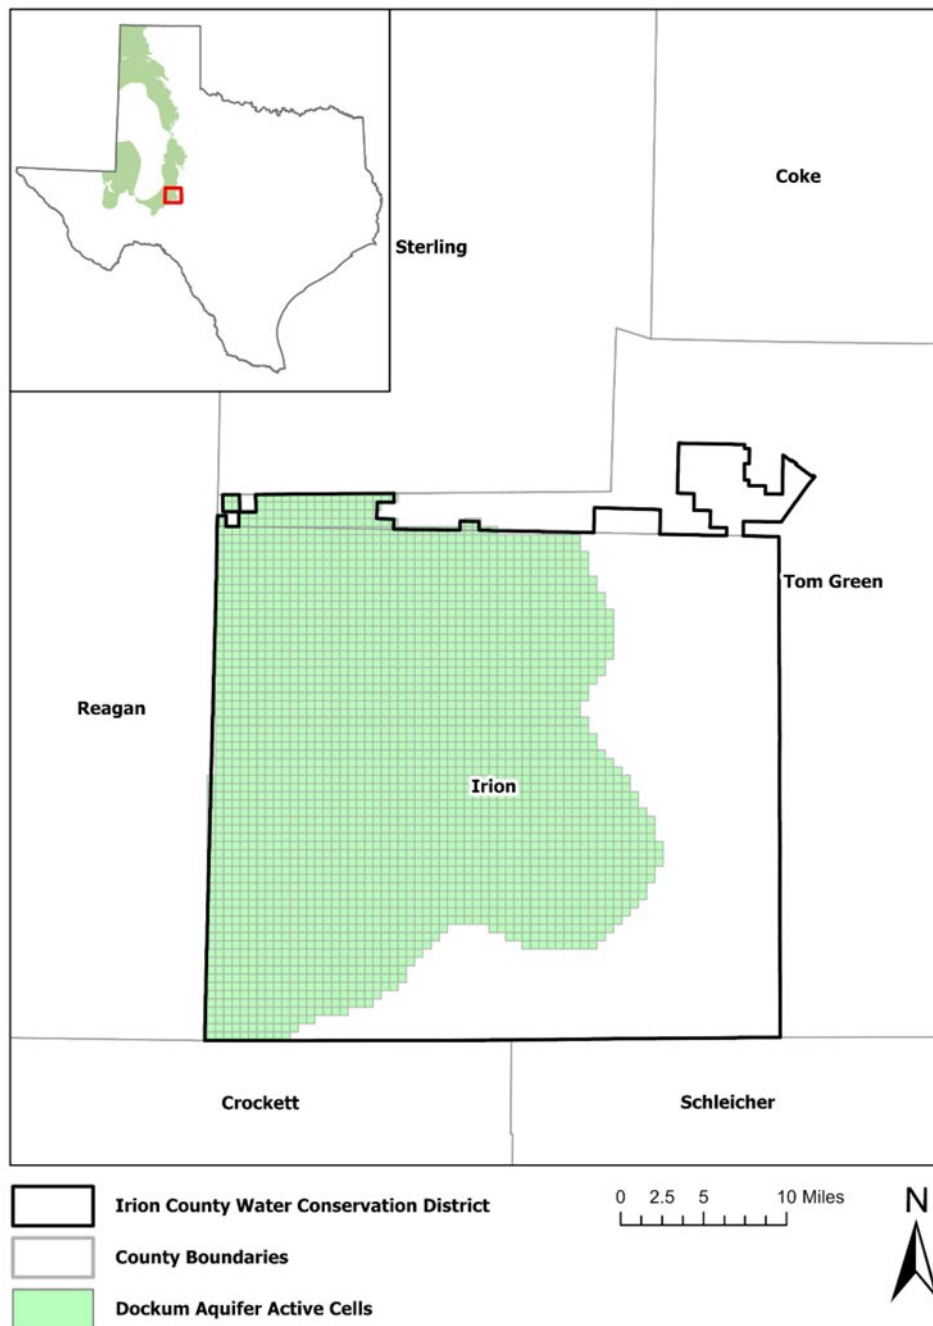

WCD Boundary: 06.26.2020, County Boundary: 07.03.2019, Grid: 01.06.2020

FIGURE 1: AREA OF THE HIGH PLAINS AQUIFER SYSTEM GROUNDWATER AVAILABILITY MODEL FROM WHICH THE INFORMATION IN TABLE 1 WAS EXTRACTED (THE DOCKUM AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

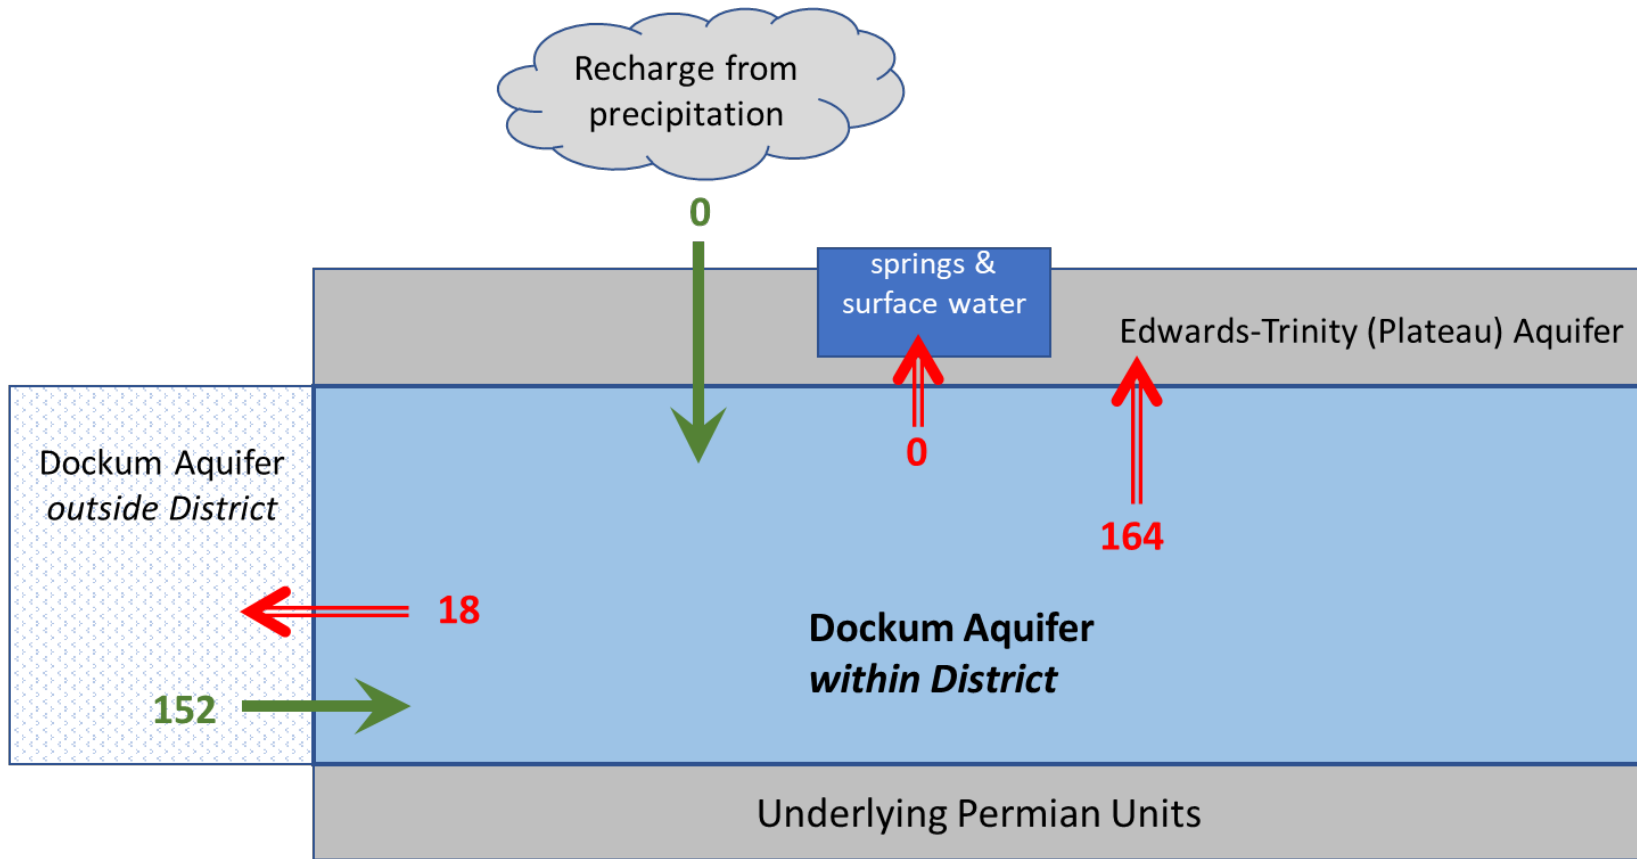

Caveat: This diagram only includes the water budget items provided in Table 1. A full water budget would include additional inflows and outflows. Please see Appendix A for a full water budget.

FIGURE 2: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 1, REPRESENTING DIRECTIONS OF FLOW FOR THE DOCKUM AQUIFER WITHIN IRION COUNTY WATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR.

TABLE 2: SUMMARIZED INFORMATION FOR THE EDWARDS-TRINITY (PLATEAU) AQUIFER THAT IS NEEDED FOR THE IRION COUNTY WATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Edwards-Trinity (Plateau)	16,734
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Edwards-Trinity (Plateau)	20,858
Estimated annual volume of flow into the district within each aquifer in the district	Edwards-Trinity (Plateau)	10,596
Estimated annual volume of flow out of the district within each aquifer in the district	Edwards-Trinity (Plateau)	5,713
Estimated net annual volume of flow between each aquifer in the district	To Edwards-Trinity (Plateau) from Dockum Aquifer	164*

*Flow to the Edwards-Trinity (Plateau) Aquifer from the Dockum Aquifer based on the High Plains Aquifer System groundwater availability model.


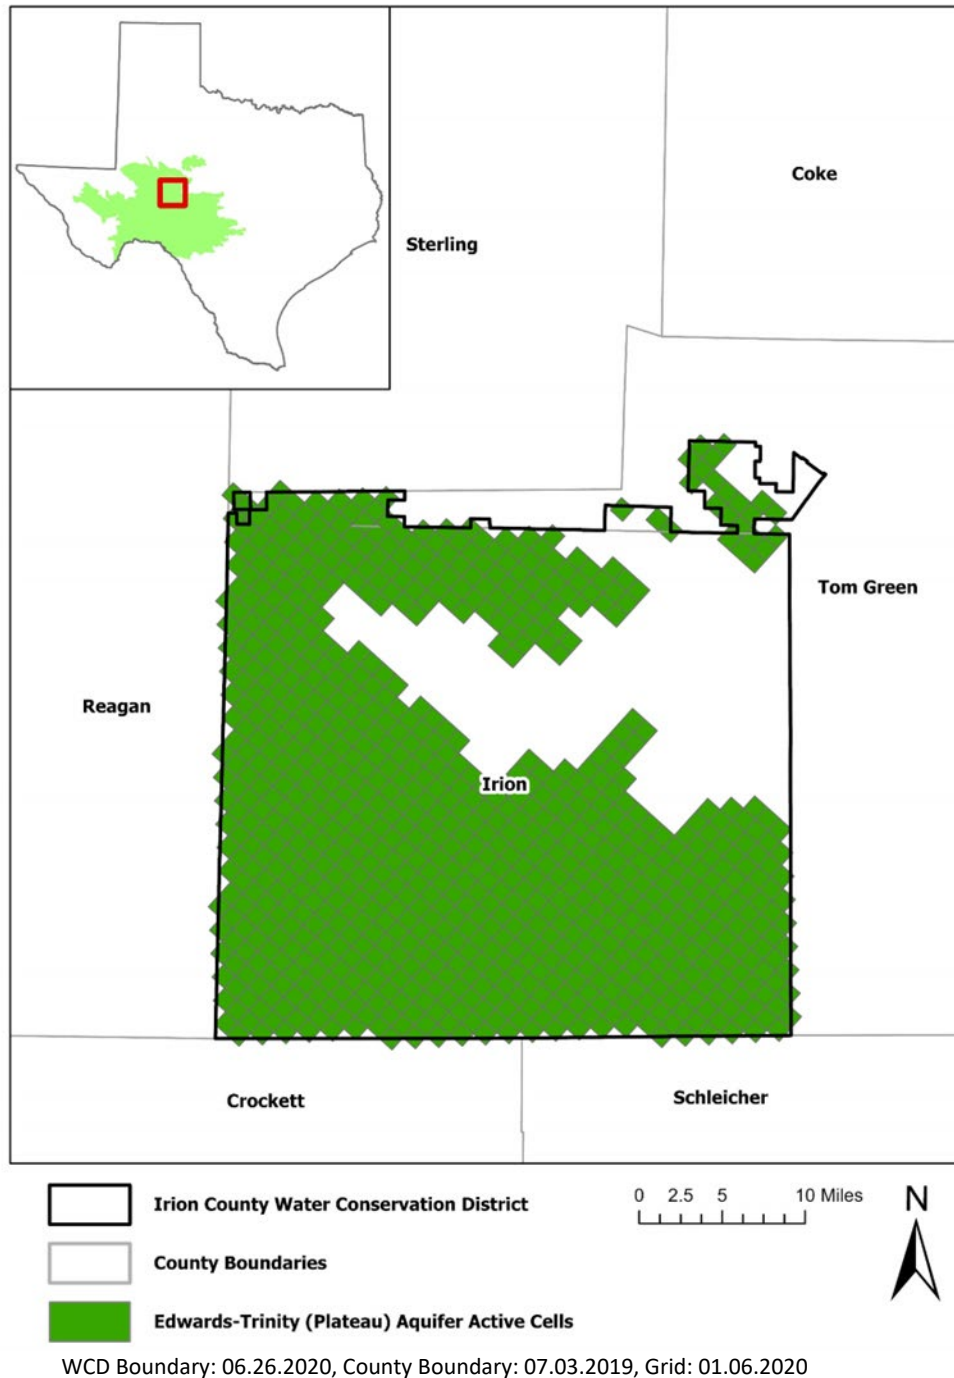


FIGURE 3: AREA OF THE EDWARDS-TRINITY (PLATEAU) AND PECOS VALLEY AQUIFER GROUNDWATER AVAILABILITY MODEL FROM WHICH THE INFORMATION IN TABLE 2 WAS EXTRACTED (THE EDWARDS-TRINITY (PLATEAU) AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

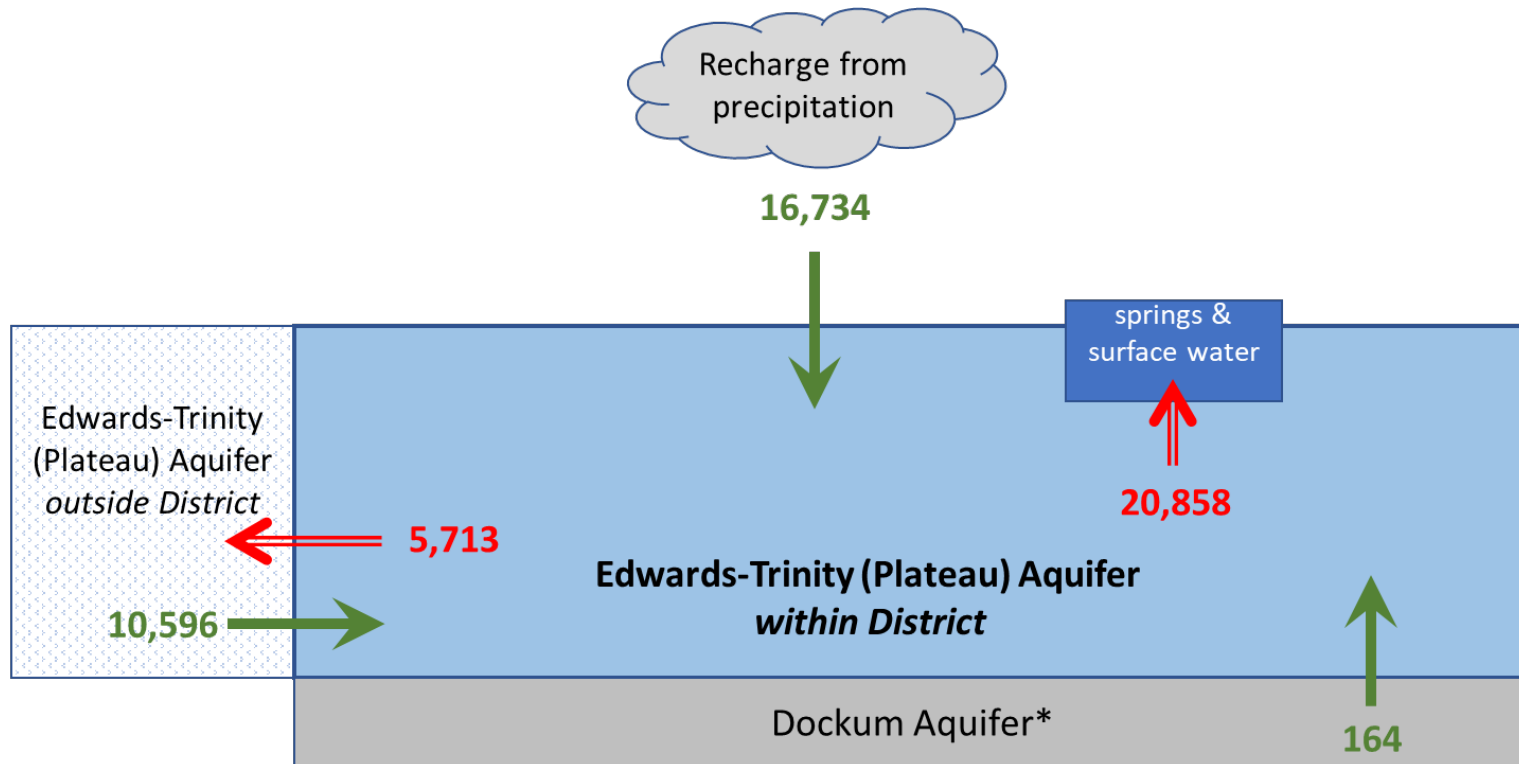

*Flow to the Edwards-Trinity (Plateau) Aquifer from the Dockum Aquifer based on the High Plains Aquifer System groundwater availability model.

Caveat: This diagram only includes the water budget items provided in Table 2. A full water budget would include additional inflows and outflows. Please see Appendix A for a full water budget.

FIGURE 4: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 2, REPRESENTING DIRECTIONS OF FLOW FOR THE EDWARDS-TRINITY (PLATEAU) AQUIFER WITHIN IRION COUNTY WATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR.

TABLE 3: SUMMARIZED INFORMATION FOR THE LIPAN AQUIFER THAT IS NEEDED FOR THE IRION COUNTY WATER CONSERVATION DISTRICT’S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Lipan Aquifer	2,238
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Lipan Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Lipan Aquifer	137
Estimated annual volume of flow out of the district within each aquifer in the district	Lipan Aquifer	2,791
Estimated net annual volume of flow between each aquifer in the district	To the Lipan Aquifer from the Edwards-Trinity (Plateau) Aquifer	4,288


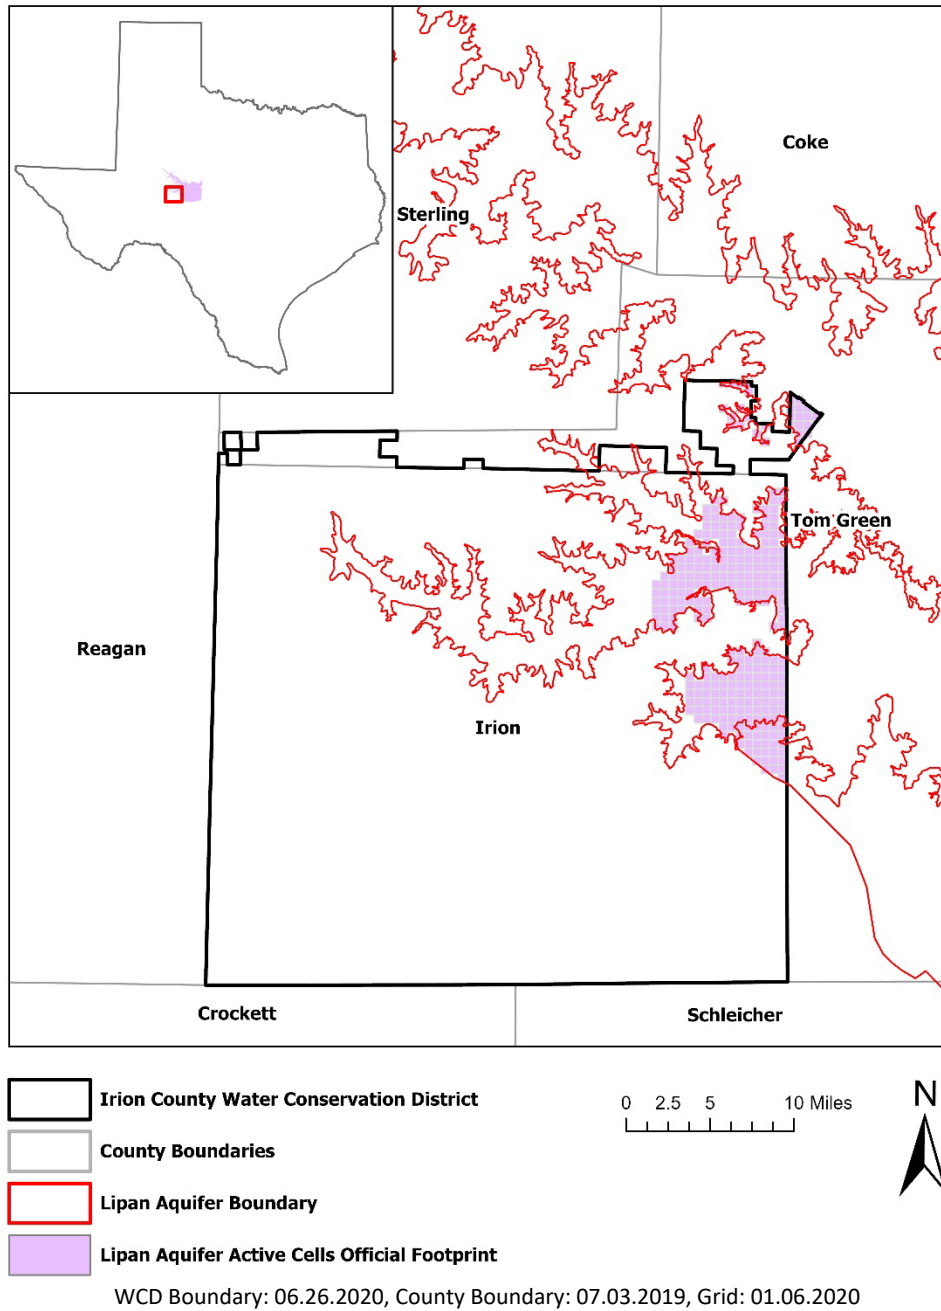


FIGURE 5: AREA OF THE LIPAN AQUIFER GROUNDWATER AVAILABILITY MODEL FROM WHICH THE INFORMATION IN TABLE 3 WAS EXTRACTED (THE LIPAN AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

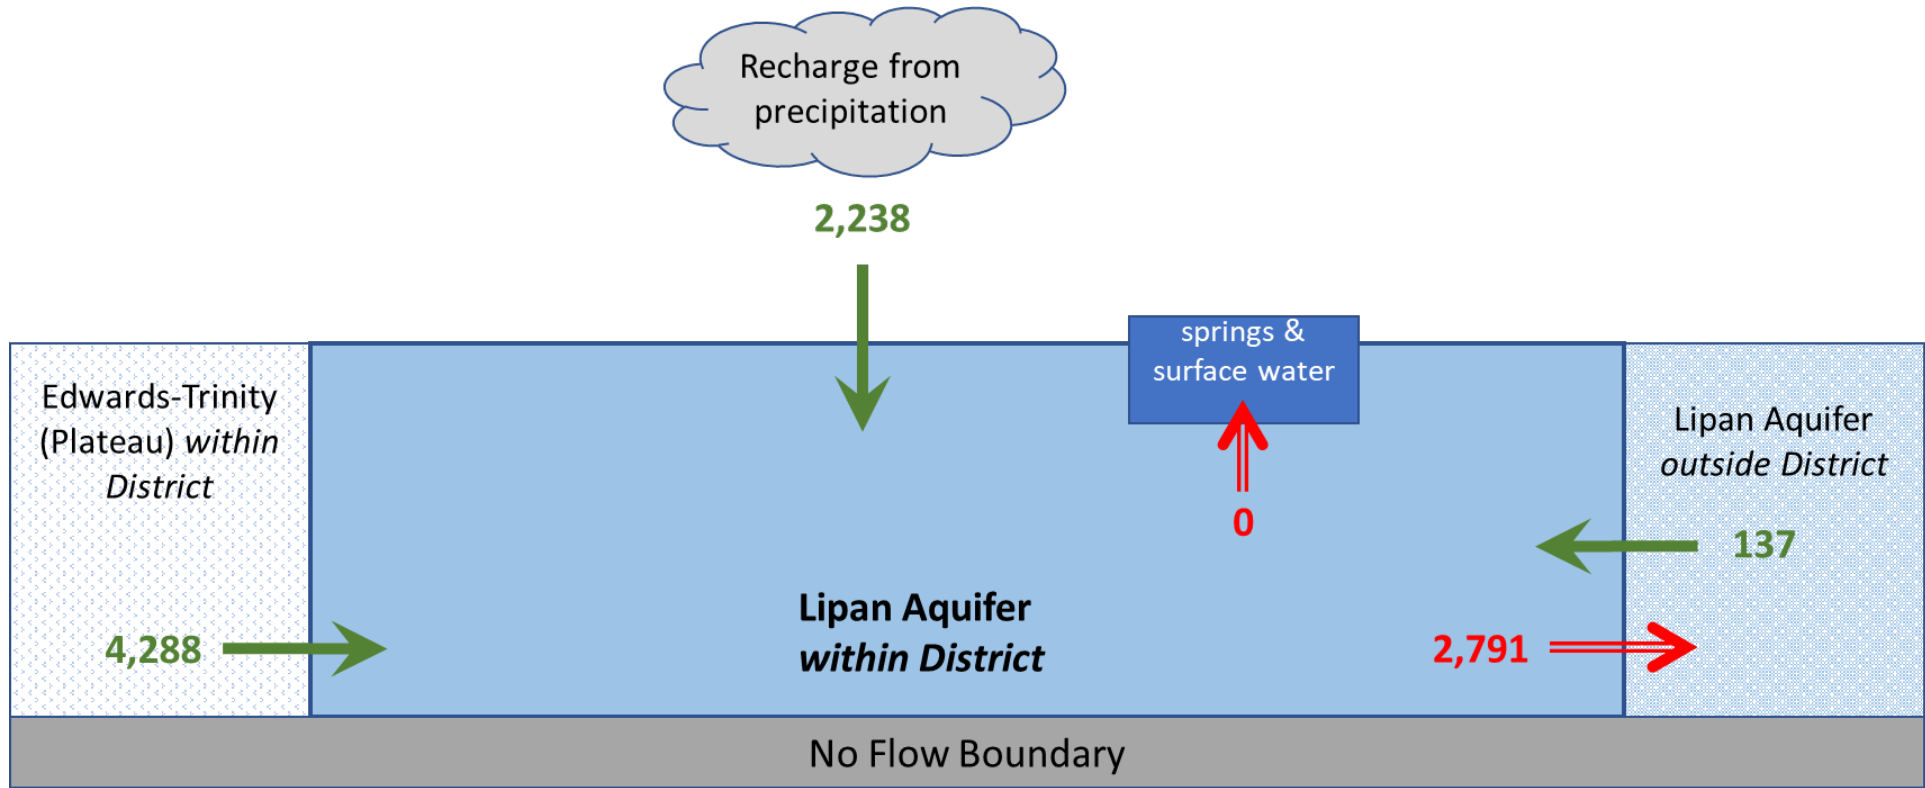

Caveat: This diagram only includes the water budget items provided in Table 3. A full water budget would include additional inflows and outflows. Please see Appendix A for a full water budget.

FIGURE 6: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 3, REPRESENTING DIRECTIONS OF FLOW FOR THE LIPAN AQUIFER WITHIN IRION COUNTY WATER CONSERVATION DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR.

LIMITATIONS:

The groundwater models used in completing this analysis are the best available scientific tools that can be used to meet the stated objectives. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historic groundwater flow conditions includes the assumptions about the location in the aquifer where historic pumping was placed. Understanding the amount and location of historical pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and interaction with streams are specific to particular historic time periods.

Because the application of the groundwater models was designed to address regional scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations related to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and overall conditions of the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historic precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

REFERENCES:

- Anaya, R., and Jones, I., 2009, Groundwater Availability Model for the Edwards-Trinity (Plateau) and Pecos Valley Aquifers of Texas: Texas Water Development Board Report 373, 103p., https://www.twdb.texas.gov/groundwater/models/gam/eddt_p/ET-Plateau_Full.pdf
- Beach, J. A., Burton, S., and Kolarik, B., 2004, Groundwater availability model for the Lipan Aquifer in Texas: final report prepared for the Texas Water Development Board by LBG-Guyton Associates, 246 p., https://www.twdb.texas.gov/groundwater/models/gam/lipn/LIPN_Model_Report.pdf
- Boghici, R., 2017, GAM Run 17-013: Texas Water Development Board, GAM Run 17-013 Report, 14 p., <https://www.twdb.texas.gov/groundwater/docs/GAMruns/GR17-013.pdf>
- Deeds, N. E., and Jigmond, M., 2015, Numerical Model Report for the High Plains Aquifer System Groundwater Availability Model: Prepared for the Texas Water Development Board by INTERA Inc., 640 p. http://www.twdb.texas.gov/groundwater/models/gam/hpas/HPAS_GAM_Numerical_Report.pdf.
- Deeds, N. E., Harding, J. J., Jones, T. L., Singh, A., Hamlin, S. and Reedy, R. C., 2015, Final Conceptual Model Report for the High Plains Aquifer System Groundwater Availability Model, 590 p., https://www.twdb.texas.gov/groundwater/models/gam/hpas/HPAS_GAM_Conceptual_Report.pdf
- Harbaugh, A. W. and McDonald, M.G., 1996, User's Documentation for MODFLOW-96, an update to the U.S. Geological Survey Modular Finite-Difference Ground-Water Flow Model, U.S. Geological Survey Open-File Report 96-485, 63 p.
- Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models, U.S. Geological Survey Groundwater Software.
- National Research Council, 2007, Models in Environmental Regulatory Decision Making Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p., http://www.nap.edu/catalog.php?record_id=11972.
- Niswonger, R.G., Panday, S., and Ibaraki, M., 2011, MODFLOW-NWT, a Newton formulation for MODFLOW-2005: USGS, Techniques and Methods 6-A37, 44 p.
- Texas Water Code, 2011, <http://www.statutes.legis.state.tx.us/docs/WA/pdf/WA.36.pdf>

Appendix A

January 23, 2023

Page 20 of 26

Appendix A – Full Groundwater Budget Diagrams.

Full water budget diagrams presented in Figures A-1 through A-5 are included to assist the Irion County Water Conservation District in analyzing the effects of pumping and recharge on the aquifers within the district. These diagrams are intended to provide additional insight for groundwater conservation districts to better understand how pumping and recharge affect their aquifers and to provide more detailed information to inform groundwater management.

Figure A-1 shows the first and last years of the historical calibration period for the Dockum Aquifer because pumping and recharge were zero for each stress period within the district. Figures A-2 and A-4 show the full water budgets for the years of minimum and maximum pumping for the Edwards-Trinity (Plateau) Aquifer and the Lipan Aquifer within the district. Figures A-3 and A-5 show the full water budgets for the years of minimum and maximum recharge for the Edwards-Trinity (Plateau) Aquifer and Lipan Aquifer within the district. Table A-1 lists each component and provides an explanation of each component contained in the full water budget diagrams.

TABLE A-1: EXPLANATION OF EACH BUDGET COMPONENT INCLUDED IN THE FULL WATER BUDGETS FOR IRION COUNTY WATER CONSERVATION DISTRICT.

Full Water Budget Component	Explanation
Recharge	Representative of recharge to the aquifer from areally distributed rainfall that reaches the water table of the aquifer.
Pumping	The amount of water pumped out of the aquifer through water wells located within the aquifer.
Natural Discharge	Represents the combination of water leaving the aquifer through ephemeral streams, springs, and free flowing wells. <ul style="list-style-type: none"> - Ephemeral streams are streams that do not flow year-round - Springs are locations where groundwater is directly connected to the ground surface and water leaves the aquifer

Appendix A

January 23, 2023

Page 21 of 26

TABLE A-1: EXPLANATION OF EACH BUDGET COMPONENT INCLUDED IN THE FULL WATER BUDGETS FOR IRION COUNTY WATER CONSERVATION DISTRICT.

Full Water Budget Component	Explanation
River Leakage	Representative of the net exchange of water between the rivers/reservoirs and the aquifer in the model.
Evapotranspiration	Represents evaporation that occurs through plants as their roots reach the water table and move water to the surface. This does not include total evapotranspiration for all plants or water features covering the modeled area.
Groundwater Exchanges	The sum of the net exchange of groundwater between the aquifer of interest within the district and all geologic units within and outside of the district boundaries.
Storage	<p>Represents the difference from the previous year in the amount of water contained within the aquifer and indicates a relative water level rise (negative Storage value) or water level decline (positive Storage value).</p> <p>Change in storage (dS) is the difference between inflows and outflows (Equation 1). To solve the zero-sum budget over the volume of the district, the term dS must be subtracted from both sides of Equation 1 (Equation 2). If total inflows are greater than outflow, Storage will be negative. If total outflows are greater than total inflows, Storage will be positive.</p> $dS = Inflows - Outflows \quad \text{Equation 1}$ $0 = Inflows - Outflows - dS \quad \text{Equation 2}$

Appendix A

January 23, 2023

Page 22 of 26

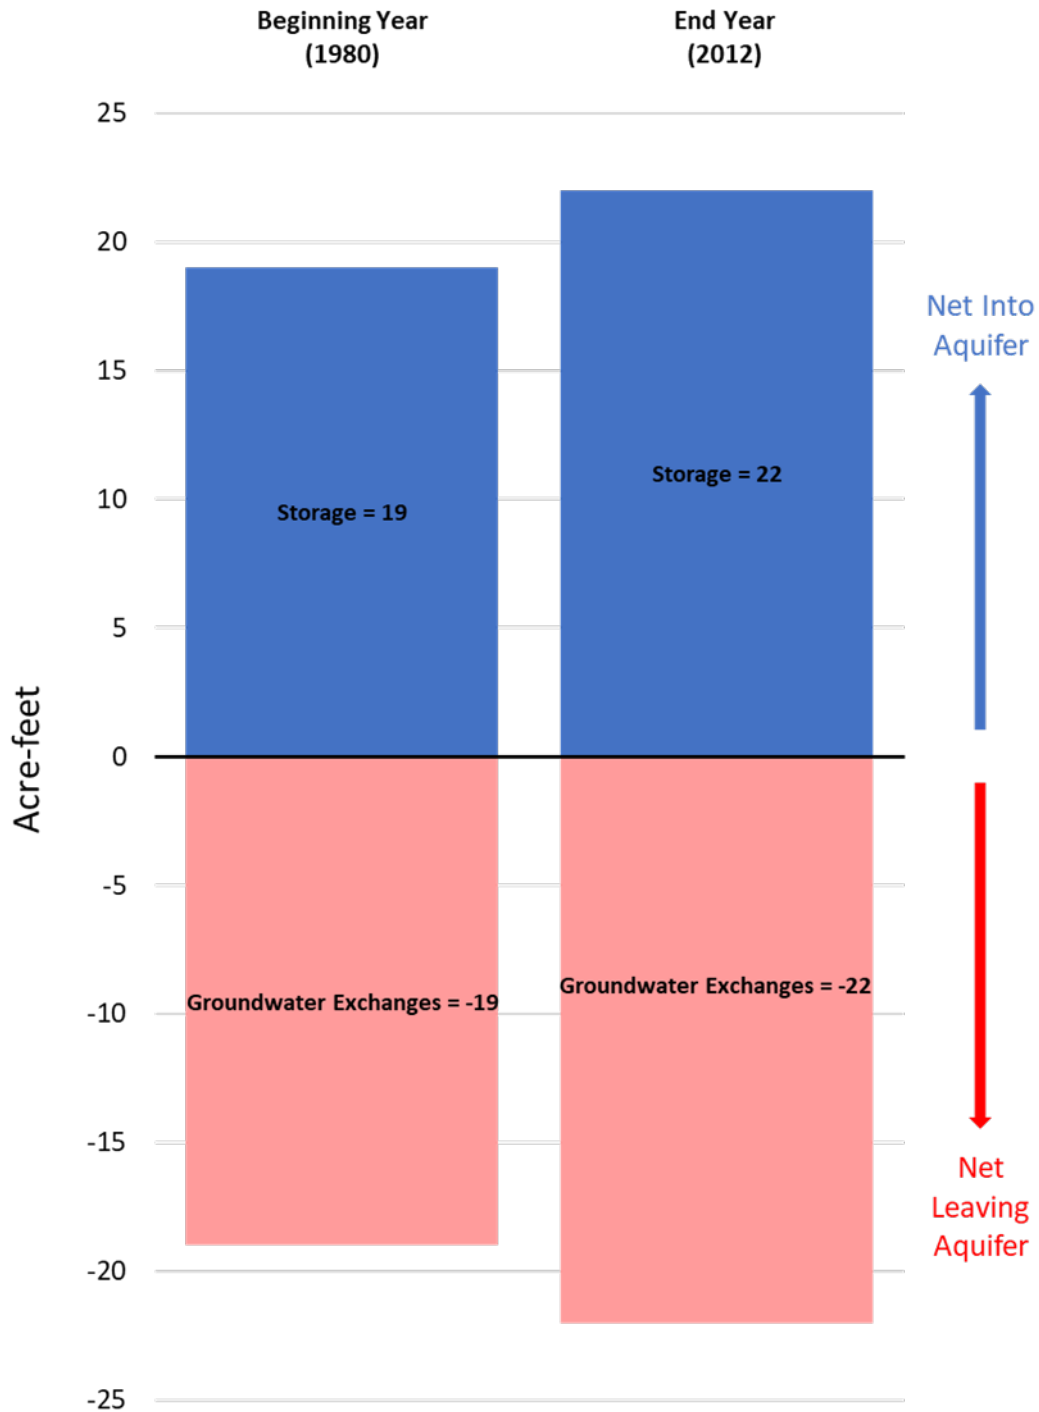


FIGURE A-1: FULL WATER BUDGETS FOR THE DOCKUM AQUIFER WITHIN THE IRION COUNTY WATER CONSERVATION DISTRICT SHOWING THE BEGINNING YEAR AND THE END YEAR OF THE HISTORICAL CALIBRATION PERIOD BETWEEN 1980 AND 2012 (PUMPING AND RECHARGE REMAINED CONSTANT THROUGH THE HISTORICAL CALIBARION PERIOD).

Appendix A

January 23, 2023

Page 23 of 26

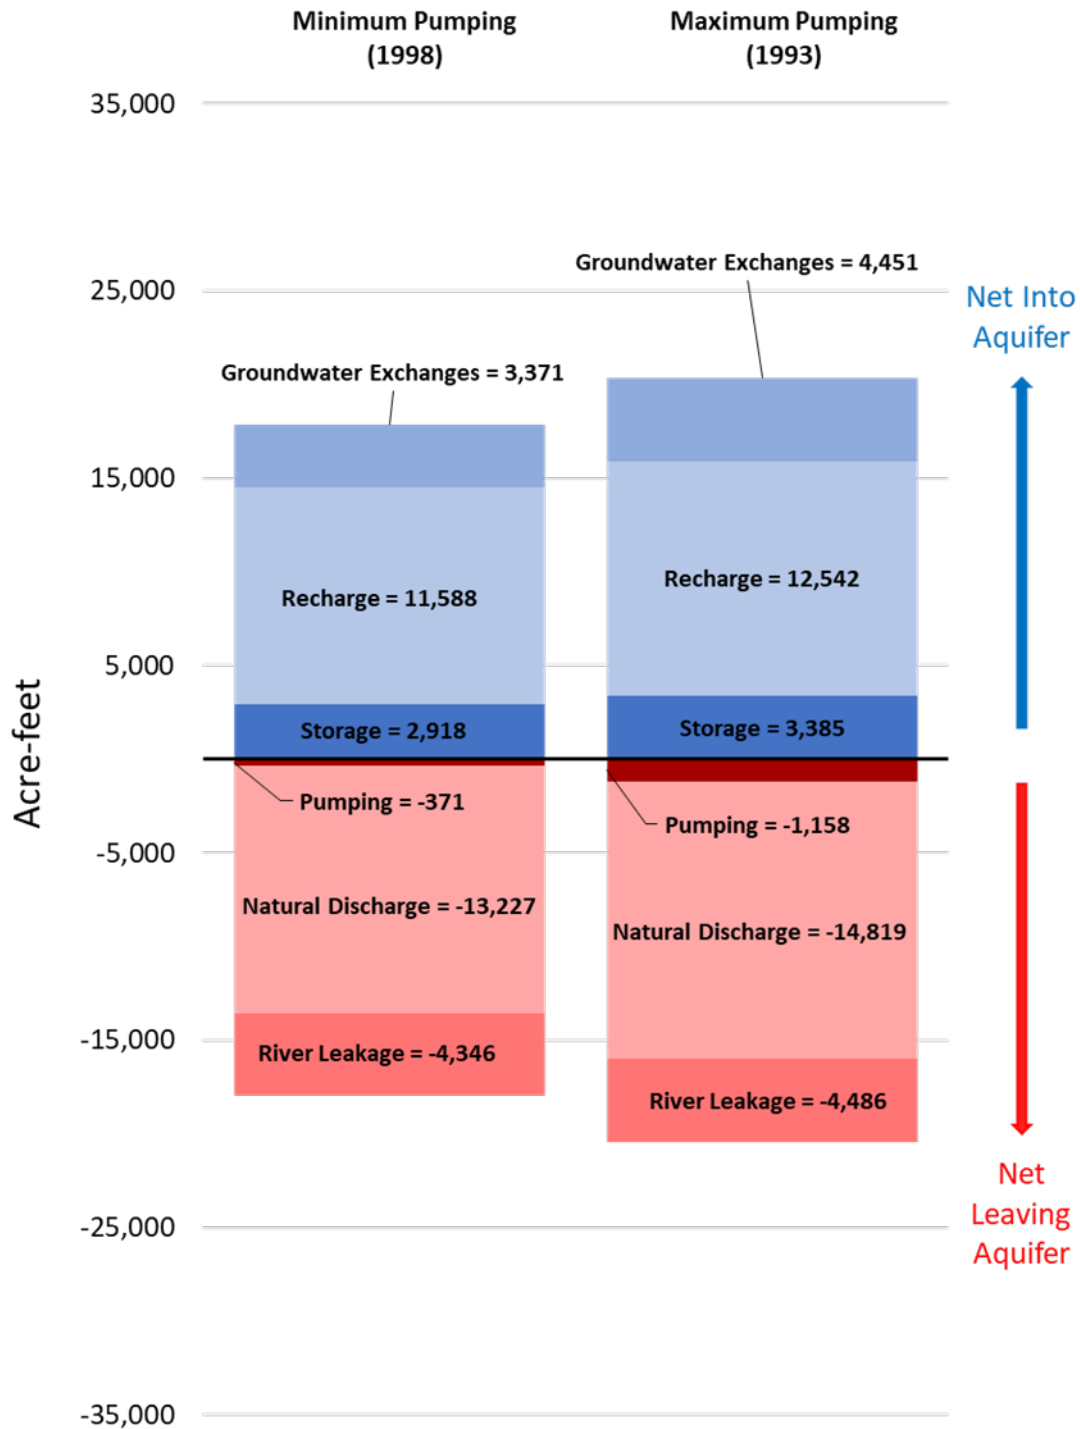


FIGURE A-2: FULL WATER BUDGETS FOR THE EDWARDS-TRINITY (PLATEAU) AQUIFER WITHIN THE IRION COUNTY WATER CONSERVATION DISTRICT SHOWING THE YEAR OF MINIMUM PUMPING AND THE YEAR OF MAXIMUM PUMPING BETWEEN 1981 AND 2000.

Appendix A

January 23, 2023

Page 24 of 26

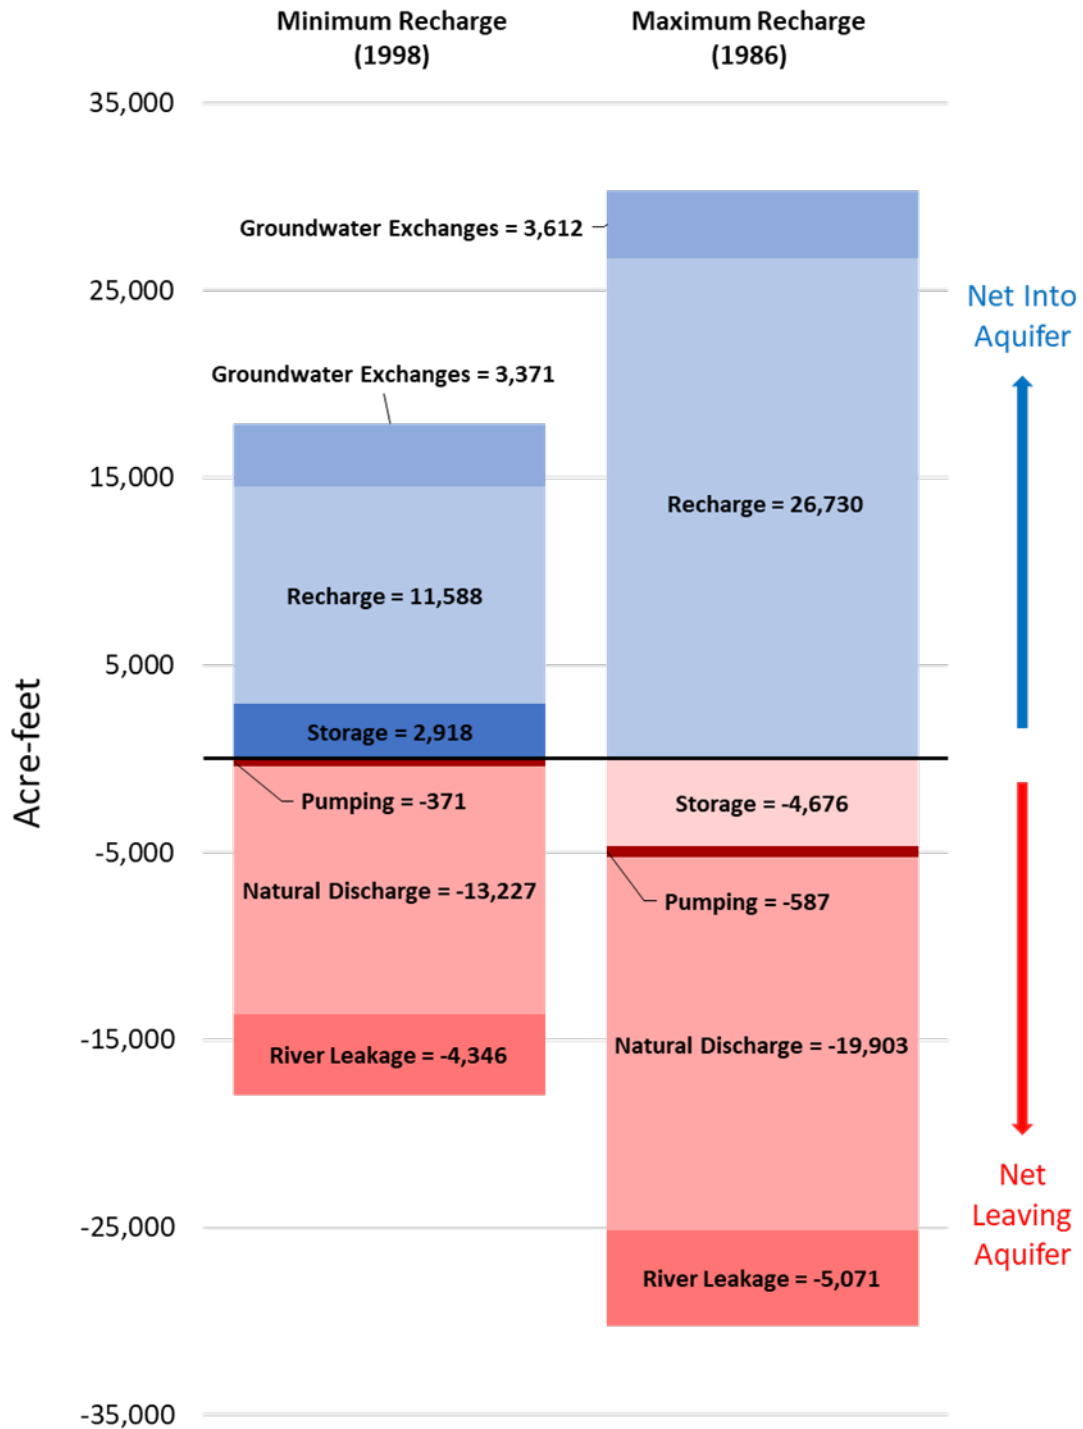


FIGURE A-3: FULL WATER BUDGETS FOR THE EDWARDS-TRINITY (PLATEAU) AQUIFER WITHIN THE IRION COUNTY WATER CONSERVATION DISTRICT SHOWING THE YEAR OF MINIMUM RECHARGE AND THE YEAR OF MAXIMUM RECHARGE BETWEEN 1981 AND 2000.

Appendix A

January 23, 2023

Page 25 of 26

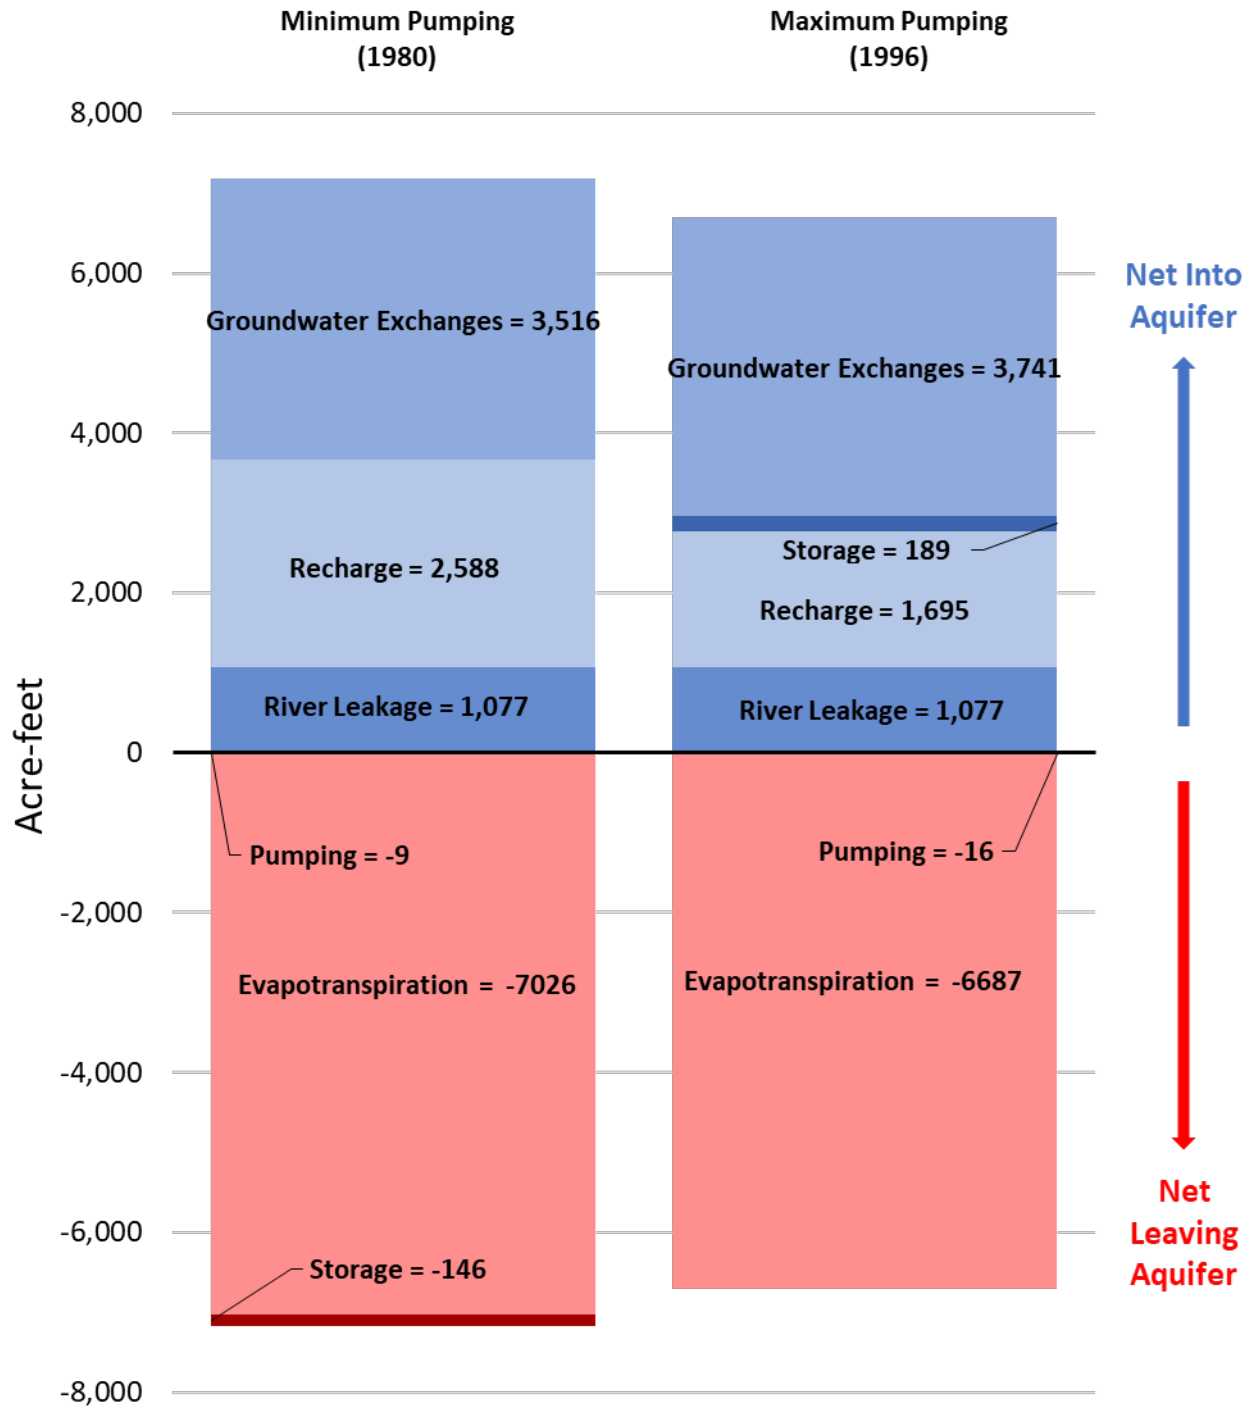


FIGURE A-4: FULL WATER BUDGETS FOR THE LIPAN AQUIFER WITHIN THE IRION COUNTY WATER CONSERVATION DISTRICT SHOWING THE YEAR OF MINIMUM PUMPING AND THE YEAR OF MAXIMUM PUMPING BETWEEN 1980 AND 1998.

Appendix A

January 23, 2023

Page 26 of 26

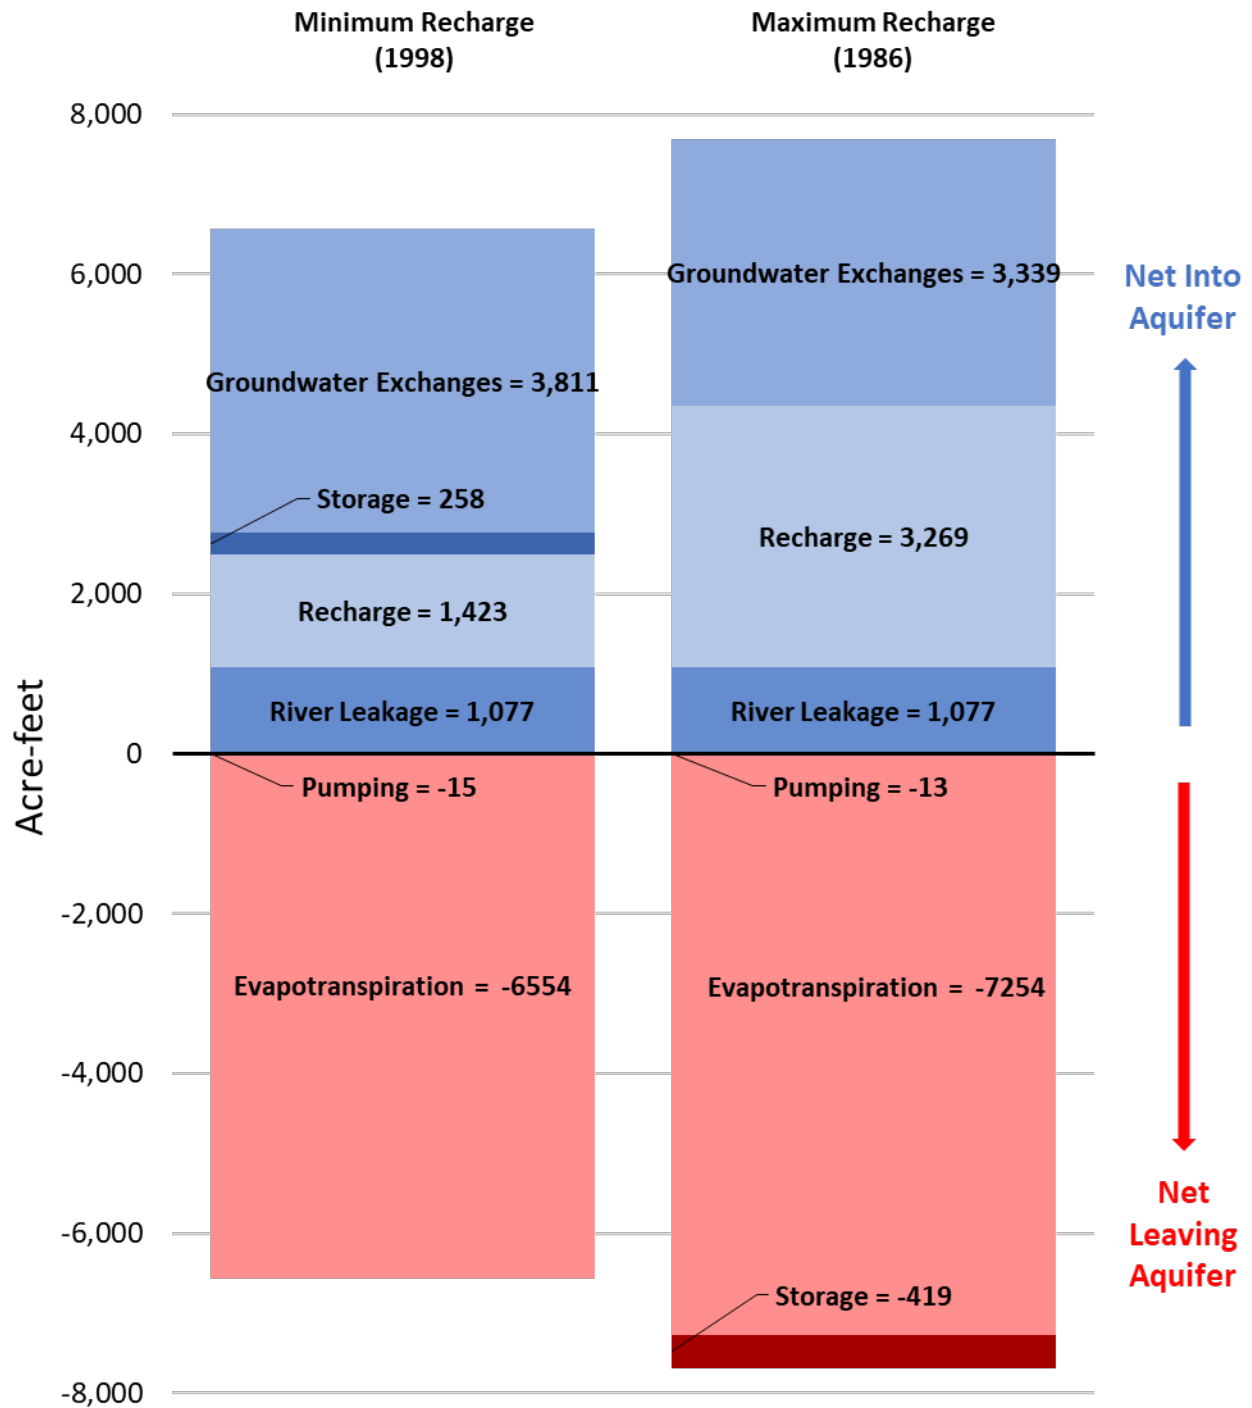


FIGURE A-5: FULL WATER BUDGETS FOR THE LIPAN AQUIFER WITHIN THE IRION COUNTY WATER CONSERVATION DISTRICT SHOWING THE YEAR OF MINIMUM RECHARGE AND THE YEAR OF MAXIMUM RECHARGE BETWEEN 1980 AND 1998.