

TEXAS WATER DEVELOPMENT BOARD

PURCHASE ORDER NUMBER:

1800012218

(Please reference this number on all packages & invoices)

PCC Code:

I

INVOICE TO:

invoice@twdb.texas.gov

Texas Water Development Board
P.O. Box 13231
Austin, Texas 78711-3231

AGENCY CONTACT:

Tina Newstrom, CTPM

Phone: (512) 463-7825

Fax: (512) 475-3009

To:	14603063174	HUB Status:	N/A	Ship to:
FUGRO Geospatial, Inc. 7320 Executive Way Frederick, MD 21704				Texas Water Development Board 1700 N. Congress Avenue, ROOM 610B Austin, TX 78701

This section for TWDB use only

P.O. DATE	ORDER PLACED BY	DATE EXPECTED	ORDER RECEIVED BY	DATE RECEIVED	ER #
01/09/18	Tina Newstrom	08/31/18			B180419

905/05, 905/10, 920/33

QTY	UNIT	DESCRIPTION	ITEM #	UNIT PRICE	TOTAL
1	lot	*TWDBs initial Portion for the Acquisition and Production of Coastal Lidar Elevation Data from Orange to Matagorda County and the H-GAC Operation Area as described in the attached SOW #580-18-SOW0050		\$253,600.00	\$ 253,600.00
*As additional funding becomes available, the TWDB will issue Purchase Order Change Notices (POCN) until the total amount of the purchase order reaches a maximum of \$453,000.00.					
DIR Contract No. DIR-TSO-3391					

SHIPPING & HANDLING	N/A
SUBTOTAL	\$ 253,600.00
SALES TAX RATE	EXEMPT
SALES TAX	\$ -
TOTAL DUE	\$ 253,600.00

Please see **PAGE 2** for additional Terms & Conditions

E-MAILED
1/9/18

Tina Newstrom 1/9/18
Authorized Signature Date

STATE SALES TAX EXEMPTIONS CERTIFICATE : The above signed claims an exemption from taxes under Chapter 20, Title 122A revised Civil Statutes of Texas, for purchase of tangible personal property described in this numbered order, purchased from vendor listed above, as this property is being secured for the exclusive use of the State of Texas. The State of Texas is exempt from all Federal Excise Taxes (poform rev. 9/02)

TEXAS WATER DEVELOPMENT BOARD TERMS & CONDITIONS
Items stated below apply to and become a part of the purchase order

APPLICABLE FOR ALL PURCHASES

- A. **Dispute Resolution** - The dispute resolution process provided for in Chapter 2260 of the Texas Government Code must be used by the Texas Water Development Board and the contractor to attempt to resolve all disputes arising under this contract.
- B. **Delinquent Taxes** - Vendor agrees that any payments due under this purchase order will be applied toward any debt, including but not limited to delinquent taxes and child support that is owed to the State of Texas.
- C. **General Information** - Vendor agrees to comply with Texas Government Code 2155.4441, pertaining to service contract use of products produced in the state of Texas.
- D. **Cancellation of Purchase Order** - Financial obligations of the state payable after each fiscal year are contingent upon funds being appropriated by the Texas Legislature budgeted or otherwise made available. If funds are not appropriated or otherwise made unavailable, any resulting contract shall be terminated without penalty upon agency giving written notice to the vendor.

APPLICABLE FOR INTER-AGENCY PURCHASES

- E. **Inter-Agency Purchase** - Legal Cite: Texas Government Code Chapter 771 (IAC) Act

APPLICABLE FOR DIRECT PUBLICATION PURCHASES (as stated in Section 2.14 in the Procurement Manual)

- F. **Direct Publication Purchases** – “Not Available from any other source”

APPLICABLE FOR ALL AIS (Automated Information Service) PURCHASES (which includes Catalogue Contract Purchases)

- G. **Technology Access Clause** – “The Vendor expressly acknowledges that state funds may not be expended in connection with the purchase of an automated information system unless that system meets certain statutory requirements relating to accessibility by persons with visual impairments. Accordingly, the Vendor represents and warrants to Texas Water Development Board that the technology provided to Texas Water Development Board for purchase is capable, either by virtue of features included within the technology or because it is readily adaptable by use with other technology, of:
 - 1. providing equivalent access for effective use by both visual and nonvisual means;
 - 2. presenting information, including prompts used for interactive communications, in formats intended for nonvisual use; and
 - 3. being integrated into networks for obtaining, retrieving, and disseminating information used by individuals who are not blind or visually impaired.

For purposes of this paragraph, the phrase "equivalent access" means a substantially similar ability to communicate with or make use of the technology, either directly by features incorporated within the technology or by other reasonable means such as assistive devices or services which would constitute reasonable accommodations under the Americans with Disabilities Act or similar state or federal laws. Examples of methods by which equivalent access may be provided include, but are not limited to, keyboard alternatives to mouse commands and other means of navigating graphical displays, and customizable display appearance."

rev. 01/16

TEXAS WATER DEVELOPMENT BOARD



STATEMENT OF WORK (SOW) #580-18-SOW0050

Coastal Lidar for Texas from Orange to Matagorda County and the H-GAC Operating Area

Class-Item Codes:

- 905-05 – Aerial Photography and Videography Services
 - 920-33 – Mapping & GIS Services, Digitized, Cartography
 - 905-10 – Aerial Surveys and Mapping services
-

DAVID.CARTER@TWDB.TEXAS.GOV
TEXAS WATER DEVELOPMENT BOARD
Purchaser: Tina Newstrom
P.O. Box 13231
Austin, TX 78711-3231
Phone: 512-463-7825
Fax: 512-475-3009
Email: Tina.Newstrom@twdb.texas.gov

Project Phase Overview

		Lidar Vendor	QA/QC Vendor	
PRE-FLIGHT PLANNING				
Kick-Off Meeting				
Phase I	<i>Lidar Tasks</i>	Develop flight operations plan		
		System calibration and geodetic control validation		
	Lidar Deliverables	Schedule		Review and comment
		Flight plan		
		Ground control plan		
Sensor calibration reports				
DATA ACQUISITION				
Phase II	<i>Lidar Tasks</i>	Perform flight setup and geodetic control process	<i>Collect QA/QC checkpoint survey</i>	
		Fly project area to collect data		
		Verify data after each flight mission		
		Collect checkpoint survey		
	Lidar Deliverables	Flight trajectories (lidar only) and GPS report	Review and comment	
		Checkpoint table and survey report		
		Data acquisition status updates		
DATA PROCESSING				
Phase III	<i>Lidar Tasks</i>	Boresight/calibration		
		Point classification		
		Intensity image production		
		Generate hydro-flattening breaklines		
	Lidar Deliverables	PILOT		Review Pilot and comment
		All-return point cloud		Review data deliverables and comment
		Hydro-flattening breaklines		
		Intensity images		Approve or reject deliverables
Re-submit Phase III deliverables as necessary				
FINAL PRODUCT DEVELOPMENT				
Phase IV	<i>Lidar Tasks</i>	Create bare-earth DEM		
		Generate metadata		
	Lidar Deliverables	DEM Raster		Review and comment
		Metadata		Approve or reject deliverables
		Re-submit Phase IV deliverables as necessary		
		Deliver whole QA/QC checkpoint table to TWDB		
		Submit final QA/QC report		
		Data processing status updates		
Project Closeout Meeting				

INVOICES: RECEIPT AND PAYMENT

An invoice schedule and payment proportions will be determined at or before the kick-off meeting and adhered to throughout the life of a project, unless otherwise agreed upon by Contractor and/or Project Partner Point-of-Contact (PPPOC).

Contractor shall submit invoice(s) to each of the PPPOC's identified in the Contract according to the invoice schedule. Each invoice must identify work performed in accordance with the SOW. Contractor shall be paid within thirty (30) days from receipt of invoice, in accordance with the Texas Prompt Payment Act, Government Code, Chapter 2251. However, if any PPPOC disputes payment of an invoice, said PPPOC must notify Contractor of the existence of a bona fide dispute. Upon request by any PPPOC, Contractor shall provide detailed documentation in support of the invoice and to the degree necessary to resolve any dispute. Any PPPOC may take any legally authorized actions for purposes of enforcing a remedy or obtaining set-off against payments due. Any PPPOC may also limit payments of the proposed Contract.

PAYMENT DISPUTES

If any PPPOC disputes payment of all or any portion of an invoice from Contractor, PPPOC shall not pay any disputed amount before the dispute is resolved. Notwithstanding any such dispute, Contractor shall, unless otherwise notified by PPPOC, continue to perform the Services and produce deliverables in compliance with the terms of the Contract pending resolution of such dispute so long as all undisputed amounts continue to be paid to Contractor.

Supplemental Information

The following datasets are provided with this solicitation at:

<http://lt.tnris.org.s3-website-us-east-1.amazonaws.com/580-18-SOW0050/>

- Areas of Interest: [58018SOW0050_TexasCoast_AOIs.shp.zip](#)
- USGS_Geiger_recommendations.docx & 2008 NUSA Lidar Executive Summary.pdf - Supporting-documents.zip

Texas Strategic Mapping Program Goals

It is the intent of the Texas Strategic Mapping Program (StratMap) to purchase geospatial data products that will provide direct savings, efficiencies, and cost duplication avoidance through inter-governmental collaboration and partnerships. The StratMap Contract is instrumental to these goals. Both the StratMap Program and the StratMap Contract are administered by the Texas Natural Resources Information System (TNRIS), a division of the Texas Water Development Board (TWDB).

Accuracy and Quality of Products

The StratMap Program, through the StratMap Contract, uses prequalified commercial data providers to collect and process geospatial data and separately selects third party quality assurance consultants, as needed, to review products and processes. Each participant in the program is expected to maintain internal quality controls and assurances to minimize errors and document procedures to ensure the data will meet or exceed requirements.

Project Phase Overview

		Lidar Vendor	QA/QC Vendor
Phase I	PRE-FLIGHT PLANNING		
	Kick-Off Meeting		
	Lidar Tasks	Develop flight operations plan	
		System calibration and geodetic control validation	
	Lidar Deliverables	Schedule	
Flight plan			
Ground control plan			
Sensor calibration reports			
DATA ACQUISITION			
Phase II	Lidar Tasks	Perform flight setup and geodetic control process	Collect QA/QC checkpoint survey
		Fly project area to collect data	
		Verify data after each flight mission	
		Collect checkpoint survey	
	Lidar Deliverables	Flight trajectories (lidar only) and GPS report	Review and comment
Checkpoint table and survey report			
Data acquisition status updates			
DATA PROCESSING			
Phase III	Lidar Tasks	Boresight/calibration	
		Point classification	
		Intensity image production	
		Generate hydro-flattening breaklines	
	Lidar Deliverables	PILOT	Review Pilot and comment
All-return point cloud		Review data deliverables and comment	
Hydro-flattening breaklines			
Intensity images		Approve or reject deliverables	
Re-submit Phase III deliverables as necessary			
FINAL PRODUCT DEVELOPMENT			
Phase IV	Lidar Tasks	Create bare-earth DEM	
		Generate metadata	
	Lidar Deliverables	DEM Raster	Review and comment
		Metadata	
		Re-submit Phase IV deliverables as necessary	Approve or reject deliverables
		Deliver whole QA/QC checkpoint table to TWDB	
		Submit final QA/QC report	
	Data processing status updates		
Project Closeout Meeting			

Lidar Specification

Intellectual Property Rights

The contracting agency shall have unrestricted rights to all delivered reports and data. All lidar products will become the property of H-GAC and TNRIS. All lidar products will be put in the public domain and be accessible from the **Texas Natural Resources Information System**, a division of the Texas Water Development Board.

Spatial Reference Framework 1 of 2

Vertical Datum	NAVD88 with most recent NGS-approved geoid to convert from ellipsoidal to orthometric heights
Horizontal Datum	NAD83 (2011)
Projection	UTM
Vertical Units	Meters (Orthometric, NAVD88)
Horizontal units	Meters

The projection must be **defined** (viewable to the data user in stakeholder software) for every lidar product.

Spatial Reference Framework 2 of 2 (delivery to H-GAC only)

Vertical Datum	NAVD88 with 2001 adjustment*
Horizontal Datum	NAD83
Projection	StatePlane Texas S Central FIPS 4204
Vertical Units	Meters (Orthometric, NAVD88)
Horizontal units	US Feet

The projection must be **defined** (viewable to the data user in stakeholder software) for every lidar product.

* see 2008 NUSA Lidar Executive Summary.pdf for use regarding subsidence research

Lidar Pre-Flight Planning and Data Acquisition			
Project Requirements			
Nominal pulse spacing (NPS)	NPS ≤ 0.500 m, or point density ≥ 4 points per m ² for first-return data		
Uniformity*	Spatial distribution of points must be uniform and free from clustering. 90% of cells in a 1-meter grid will contain at least one first-return point. See Data voids for exclusions.		
Buffer	300 meter buffer surrounding the AOI is required for flight planning and acquisition, with no buffer needed in between tiles. Buffer will not be included in final delivery.		
Multiple returns*	Lidar sensor shall be capable of at least three (3) returns per pulse, including first and last returns. Multiple returns from a given pulse shall be stored in sequential order and point families must remain intact. For Geiger mode systems, see attached document.		
Return attributes	Each return must include: easting, northing, elevation, intensity, order of return (i.e. first-return, second-return), classification, and Adjusted GPS Time. Easting, northing, and elevation must be recorded to the nearest 0.01 m and GPS second reported to the nearest microsecond (or better). May include additional attributes. No duplicate entries.		
Scan angle	For lidar systems with an oscillating mirror, scan angle should not exceed ±20 degrees from nadir. Total field of view or full scan angle ≤ 40°. Rotating mirror systems are exempt from this requirement, but must provide planning of additional flight lines or other measures over dense urban areas to mitigate shadowing voids resulting from use of a FOV > 40°. For Geiger mode systems, see attached document.		
Swath overlap	Minimum 30% overlap on adjoining swaths. For Geiger mode systems, see attached document.		
Data voids*	Data voids are defined as areas > [(4*NPS) ²] with no first-return points. Data voids are unacceptable unless caused by water bodies or areas of low near-infrared (NIR) reflectivity (i.e. wet asphalt). No voids between swaths.		
Survey conditions	Leaf-off and no significant snow cover or flood conditions, unless approved by TWDB. Must be cloud, smoke, dust and fog-free between the aircraft and ground.		
GPS Procedures and Accuracy			
Positional accuracy validation	The absolute and relative accuracy of the data, both horizontal and vertical, and relative to known control, shall be verified prior to classification and subsequent product development. Report accuracies in metadata as compiled to meet the specified vertical accuracy at the 95% confidence level in open terrain according to the <u>National Standard for Spatial Data Accuracy (NSSDA)</u> . Refer to Lidar Accuracy Assessment for details on QA/QC accuracy testing.		
Acquisition GPS procedures	At least two (2) GPS reference stations in operation during all missions, sampling positions at 1 Hz or higher frequently. Differential GPS baseline lengths shall not exceed 40 km, unless otherwise approved. Differential GPS unit in aircraft shall sample position at 2 Hz or more frequently. Lidar data shall only be acquired when GPS PDOP is ≤ 4 and at least 6 satellites are in view.		
Geodetic control	Lidar vendor must supply ground control for acquisition and processing. See Quality Assurance and Quality Control portion of TWDB SOW # 58018SOW0051 for recommended collection guidelines.		
Accuracy: ASPRS Class 10cm*	Non-Vegetated	RMSE _z	< 10 cm
		Accuracy _z 95%	< 19.6 cm
	Vegetated	Accuracy _z 95%	< 29.4 cm
		Horizontal	RMSE _r
Relative (swath to swath)	RMSD _r /Max Diff	< 8.0/16.0 cm	

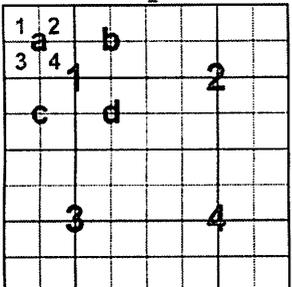
Metadata	
Format	Tile-level metadata consisting of separate XML files paired with each data tile as well as project-level metadata for non-tiled data in XML format.
FGDC Standard	All metadata shall be consistent with the <u>Federal Geographic Data Committee's Content Standards for Digital Geospatial Metadata</u>
Methodology	Metadata will include processing steps and software used. If requested, sample metadata will be provided by TWDB.

Lidar Data Processing and Final Product Development			
Fully Classified All-Return Point Cloud			
Format	All-return point cloud in fully-compliant LAS version 1.4. All points must be classified according to the ASPRS classification standard for LAS.		
Spatial reference	LAS files will use the Spatial Reference Framework according to project specification and all files shall be projected and defined.		
ASPRS Classifications Required	Class 1. Unclassified Class 2. Bare-earth Ground Class 3. Low Vegetation	Class 4. Medium Vegetation Class 5. High Vegetation Class 6. Building Class 7. Low Point (noise)	Class 9. Water Class 10. Ignored Ground Class 13. Bridges Class 14. Culverts
Withheld points*	Outliers, noise, blunders, geometrically unreliable points near the extreme edge of the swath, and other points deemed unusable are to be identified using the "Withheld" flag. This applies primarily to points which are identified during pre-processing or through automated post-processing routines. Subsequently identified noise points may be assigned to the standard Noise Class (Class 7), regardless of whether the noise is lower or higher relative to the ground.		
Overlap class*	The ASPRS Overlap Class (Class 12) shall NOT be used. All points must be classified unless identified as "Withheld".		
Classification accuracy*	Within any sample 1 km x 1 km area, no more than 1% of non-withheld points in the classes listed above will possess a demonstrably erroneous classification value. This includes Unclassified points (Class 1) that should be correctly included in a different class as required by this specification. This requirement may be relaxed to accommodate collections in areas where the TWDB agrees classification to be particularly difficult.		
Classification consistency*	Point classification shall be consistent across the entire project. Noticeable variations in the character, texture, or quality of the classification between tiles, swaths, lifts, or other non-natural divisions will be cause for rejection of the entire deliverable.		

Bare Earth Lidar / DEM Raster	
Format	Hydro-enforced 32-bit floating point raster DEM in (TBD at kick-off meeting) format to nearest 0.01-m is preferred, however similar raster formats may be permitted at the discretion of the TWDB.
Spatial reference	DEM files will use the Spatial Reference Framework according to project specification and all files shall be projected and defined.
Spatial resolution	1-meter DO4Q tiles (See File Naming Convention)
DEM tile buffer	All final DEM tiles should be delivered with a buffer that extends 50 meters around all four sides of the DEM tile. All final DEM tiles should have 90 degree corners, not rounded. The extents shall be computed by projecting the geographic corners and side midpoints to the required projection, then adding the buffer on each side of the resulting minimum bounding rectangle.
Quality	No seams, stepping, gaps, or quilting should be visible (unless naturally occurring), whether caused by differences in processing quality or character between tiles, swaths, lifts, or other non-natural divisions and will be cause for rejection of the entire DEM deliverable. There shall be no "plateau effect" from rounded or integer elevation values (must be floating point). Also see 'Data voids' under Project Requirements.
Artifacts	Vegetation, bridges, buildings, and other artifacts must be completely removed from Class 2 Bare-earth Ground. Artificial dams in waterways caused by bridges or other adjacent structures are not permitted with the exception of culverts. See 'Culverts and Bridges' under Hydro-flattening breaklines for more information.
Filtering	There shall be no over-aggressive filtering of the Ground class resulting in gaps or a degradation of DEM quality (e.g. hilltops shaved flat or data voids). There shall also be no under-aggressive filtering of the Ground class resulting in a degradation of DEM quality (e.g. portions of buildings or vegetation included in Ground or overly noisy surface).
Sinks	Depression sinks, natural or man-made (not erroneous), are not to be filled (as in hydro-conditioning).
Breaklines	Hydrologic breaklines shall be used to define stream/river channels and water bodies allowing for unimpeded water flow. See Hydro-flattening breaklines below for more information.
No data	Acceptable internal voids and voids outside the project boundary shall be coded as a unique NODATA value identified within the raster file header.

Hydro-flattening Breaklines	
Format	All breaklines developed for use in hydro-flattening shall be delivered as a non-tiled Esri feature class for the entire AOI in polygon and/or polyline shapefile or geodatabase format. Waterbodies (ponds, lakes, and reservoirs), wide streams and rivers ("double-line"), and other non-tidal waterbodies are to be hydro-flattened within the DEM, resulting in a flat and level bank-to-bank gradient. The entire water surface edge must be at or below the immediately surrounding terrain. Bare-earth lidar points that are near the breaklines (proximity not to exceed NPS) shall be classified as Ignored Ground (class value equal to 10).
Spatial reference	Breakline feature class will use the Spatial Reference Framework according to project specification and shall be projected and defined.
Stream resolution	Hydro-flattening shall be applied to all streams that are nominally wider than 15.25 meters (~50 feet) , and to all non-tidal boundary waters bordering the project area regardless of size. Stream features should be made continuous even when a segment narrows below this threshold for a distance of at least 1600 meters to maintain cartographic integrity. Flattened rivers and streams shall present a gradient downhill water surface, in accordance with the immediately surrounding terrain. In cases of drought, flood or rapidly moving water demonstrating conditions where the water surface is notably not level bank to bank, the water surface will be represented as it exists during acquisition while maintaining an aesthetic cartographic appearance.
Waterbody resolution*	Hydro-flattening shall be applied to all water impoundments, natural or man-made, that are nominally larger than 2 acres in area. Long impoundments such as reservoirs, inlets, and fjords, whose water surface elevations drop when moving downstream, are required to be treated as rivers.
Non-tidal boundary waters*	Represented only as an edge or edges within the project area; collection does not include the opposing shore. Water surface is to be flat and level, as appropriate for the type of water body (level for lakes; gradient for rivers). The entire water surface edge must be at or below the immediately surrounding terrain.
Tidal waters*	Tidal water bodies are defined as water bodies such as oceans, seas, gulfs, bays, inlets, salt marshes, large lakes, and the like. This includes any water body that is affected by tidal variations. Tidal variations over the course of a collection or between different collections will result in lateral and vertical discontinuities along shorelines. This is considered normal and these anomalies should be retained. The final DEM is required to represent as much ground as the collected data permits. Water surface is to be flat and level, to the degree allowed by the irregularities noted above. Reasonable planning efforts should be made to minimize tidal deviations if possible. Scientific research projects in coastal areas often have specific requirements with regard to how tidal land-water boundaries are to be handled. For such projects, the requirements of the research will take precedence.
Islands*	Permanent islands 4,000 m ² (1 acre) or larger shall be delineated within all water bodies.
Culverts and Bridges	Stream channels should break at road crossings (culvert locations). These road fills in Class 14 Culverts should not be removed from the DEM. However, streams and rivers should not break at elevated bridges. Bridges should be removed from the DEM (see 'Artifacts' under Bare Earth Lidar/DEM Raster). When the identification of a feature such as a bridge or culvert cannot be made reliably, the feature should be regarded as a culvert.

Intensity Images	
Format	Raster image of first-return intensity values in an acceptable format.
Spatial reference	Intensity images will use the Spatial Reference Framework according to project specification and all files shall be projected and defined.
Spatial resolution	≤ 1-meter DO4Q tiles
Image tile buffer	All final image tiles should have a buffer that extends 50 meters around all four sides of the image tile. All final image tiles should have 90 degree corners, not rounded. The extents shall be computed by projecting the geographic corners and side midpoints to the required projection, then adding the buffer on each side of the resulting minimum bounding rectangle.
Radiometric resolution	Unsigned 8-bit, 16-bit or 32-bit (highest available). Intensity images should typically contain original digital number (DN) values ranging from 0 - 100 or greater for ≥ 80% of areas with diverse land cover conditions.
Histogram	Histogram should be very close to normally distributed with minimal or no clipping.
Consistency	Images should be consistent in contrast and tone across project AOI. There should be no striping, tiling, or banding across project AOI.

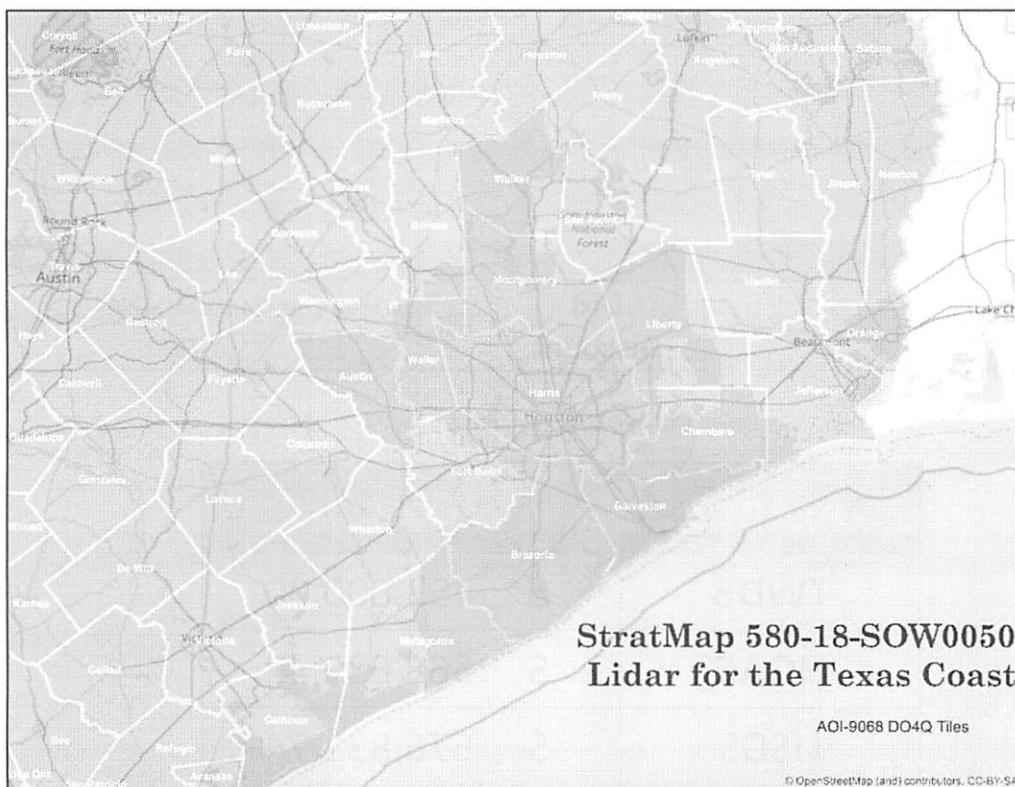
File Naming Convention	
<p>USGS 7.5 min Quad 3097_18</p>  <p>Filename: 3097_18_1_a_1</p>	<p>Applies to the following:</p> <ul style="list-style-type: none"> All-return point cloud in LAS Bare-earth DEM Intensity images Tile-level metadata <p>Structure for data listed above shall conform to:</p> <ul style="list-style-type: none"> 1/64th USGS 7.5-minute quadrangle Quarter-quarter-quarter quadrangle (DOQQQQ, or DO4Q) <p>Structure shall be as follows: stratmap17-nps-DO4Qstring For example: stratmap17-50cm-3098011a1</p>

Lidar Deliverables	
Phase I Deliverables	
Schedule	Project timeline (schedule) with projected milestones should also include due dates for BOTH Phase III and Phase IV, to be separated by at least six weeks for QA/QC. Schedule should be provided to TWDB in a PDF, .docx, or .xlsx format.
Flight plan	Flight plan for each AOI shall include: aircraft flight lines and GPS base stations in use during acquisition delivered in ESRI feature class, shapefile, or kmz/kml format.
Ground Control Plan	Planned ground control and checkpoints on graphic map(s) and delivered in shapefile or kmz/kml format.
Sensor Calibration Report	Most recent calibration report for all lidar sensors used for collection.
Phase II Deliverables	
Flight trajectories	Smoothed Best Estimate of Trajectory (SBET) files with recorded aircraft position (easting, northing, elevation) and attitude (heading, pitch, and roll) and Adjusted GPS time recorded at regular intervals of 1 second or less and delivered in ESRI feature class or shapefile format. May include additional attributes.
Flight report	Flight report should include at a minimum the following mission parameters: sensor make and model, nominal ground sampling distance, scan angle, average groundspeed, laser pulse rate, scan rate, and average flying altitude. Network parameters with base station IDs and location should be included as well as flight PDOP.
Control table	Any checkpoints collected by the lidar vendor for internal quality control shall be provided to TWDB in an electronic table (csv and shp) including State Plane (4202) coordinates (X,Y,Z) to three (3) decimal places, point ID and land cover type, at a minimum.
Control survey report	Along with control table, lidar vendor shall submit associated survey report including at a minimum selected geodetic control network and spatial parameters (i.e. coordinate system, geoid model).
Phase III Deliverables	
Pilot Data	The lidar vendor (in consultation with TWDB and project partners) will select a minimum of four (4) contiguous tiles within the project AOI which shall serve as a Pilot area. The Pilot will be delivered to TWDB and the QA/QC review consultant and shall include all-return point cloud, DEM and intensity image products delivered in final product form to meet or exceed the specifications established in this document. It is recommended that processing of other data in the AOI be suspended until the Pilot data have been approved by TWDB.
All-return point cloud	To be received by QA/QC review consultant on or before Phase III Deliverables due date. See section above titled <i>Phases III & IV: Data Processing and Final Product Development</i> for details. Final products must pass QA/QC review before acceptance.
Hydro-flattening Breaklines	
Intensity images	
Phase IV Deliverables	
DEM raster	To be received by QA/QC review consultant on or before Phase IV Deliverables due date. See section above titled <i>Phases III & IV: Data Processing and Final Product Development</i> for details. Final products must pass QA/QC review before acceptance.
Metadata	

REFERENCES

- Adobe Systems Incorporated. TIFF Revision 6.0. 3 June 1992.
<http://partners.adobe.com/public/developer/en/tiff/TIFF6.pdf>
- American Society for Photogrammetry and Remote Sensing. 2013. ASPRS Accuracy Standards for Digital Geospatial Data. *Photogrammetric Engineering & Remote Sensing* 79, no. 12: 1073-1085.
- American Society for Photogrammetry & Remote Sensing. ASPRS Guidelines Vertical Accuracy Reporting for Lidar Data. 24 May 2004.
[http://www.asprs.org/a/society/committees/lidar/Downloads/Vertical Accuracy Reporting for Lidar Data.pdf](http://www.asprs.org/a/society/committees/lidar/Downloads/Vertical%20Accuracy%20Reporting%20for%20Lidar%20Data.pdf)
- American Society for Photogrammetry & Remote Sensing. LAS Specification Version 1.4-R6. 10 June 2012.
http://www.asprs.org/a/society/committees/standards/LAS_1_4_r12.pdf
- Federal Geographic Data Committee. Content Standard for Digital Geospatial Metadata (FGDC-STD-001-1998). 1998.
<http://www.fgdc.gov/metadata/csdgm>
- Federal Geographic Data Committee. Geographic Information Framework Data Content Standard Part 2: Digital Orthoimagery. May 2008. http://www.fgdc.gov/standards/projects/FGDC-standards-projects/framework-data-standard/GI_FrameworkDataStandard_Part2_DigitalOrthoimagery.pdf
- Federal Geographic Data Committee. Geospatial Positioning Accuracy Standards Part 3: National Standard for Spatial Data Accuracy. 1998. <http://www.fgdc.gov/standards/projects/FGDC-standards-projects/accuracy/part3/chapter3>
- GeoTiff Format Specification, GeoTiff Revision 1.0 (Version 1.8.2). 28 December 2000.
<http://www.remotesensing.org/geotiff/spec/geotiffhome.html>
- Heidemann, Hans Karl. U.S. Geological Survey Lidar Base Specification Version 1.0. 17 August 2012.
<http://pubs.usgs.gov/tm/11b4/>
- Maune, David F. Digital Elevation Model Technologies and Applications: The DEM User's Manual, 2nd Edition. 2007.
- Maune, David F. FEMA's Mapping and Surveying Guidelines and Specifications. 2003.
[http://w.pсадewberry.com/Libraries/Documents/FEMAs_Mapping and Surveying Guidelines and Specifications ASPRS Fall2003.pdf](http://w.pсадewberry.com/Libraries/Documents/FEMAs_Mapping_and_Surveying_Guidelines_and_Specifications_ASPRS_Fall2003.pdf)
- National Digital Elevation Program. Guidelines for Digital Elevations Data (Version 1.0). 10 May 2004.
http://www.ndep.gov/NDEP_Elevation_Guidelines_Ver1_10May2004.pdf
- The National Geodetic Survey. The NGS Geoid Page. 11 September 2012. <http://www.ngs.noaa.gov/GEOID/>
- Ritter, Niles and Mike Ruth. GeoTiff Format Specification GeoTiff Revision 1.0. 28 December 2000.
<http://www.remotesensing.org/geotiff/spec/geotiffhome.html>
- U.S. Geological Survey. XMLInput Application. 23 August 2002. <ftp://ftpext.usgs.gov/pub/cr/mo/rolla/release/xmlinput/>

AREA OF INTEREST MAP



PRICING TABLE

Electronic table available online (see **Supplemental Information**)

Pricing Table for State of Texas Lidar Specification					
TWDB 580-17-SOW0050 AOI					
Company Name:					
DO4Q Tiles	9,068				
Nominal Point Density	≥4				
RMSE _z	10 cm				
Acquisition Time Period	Leaf-off 2017-2018				
Lidar Acquisition					
Lidar Deliverables					
Classified LAS Point Cloud					
Bare Earth DTM					
Intensity Image					
Breaklines					
Metadata					
Other ancillary files and reports as listed in SOW					
Lidar Cost Per DO4Q Tile	\$ 195.76	DIR Discount	5%	Lidar Cost Per DO4Q Tile with DIR Discount	\$187.37

Federal funds will be paid through TWDB

Agency	Cost
TWDB	\$ 453,600.00
HGAC	\$ 568,639.42
USGS	\$ 676,831.74
Total	\$ 1,699,071.16


Schedule

Ground Control	December 15, 2017 - January 19, 2018
Acquisition	January 3, 2018 to February 28, 2018
Production	March 1, 2018 to September 24, 2018
QA/QC and Repair	September 25, 2018 to November 23, 2018
Delivery	November 26, 2018

*This represents the proposed schedule. Actual schedule is dependent on weather conditions


This Statement of Work (SOW) is executed to be effective immediately upon the date of the last signature. This SOW is submitted under the terms and conditions of DIR Contract DIR-TSO-3391 dated 05/20/2016.

Vendor: Fugro Geospatial, Inc.

Signature: 

Name and Title: DAVE WHITE, SENIOR VICE PRESIDENT

State Agency: Texas Water Development Board

Signature: 

Name and Title: Deputy Executive Administrator
Richard Wade

Texas Department of Information Resources SOW ID# TWDB-000024

Signature: DocuSigned by:
Hershel Becker
7F04C0B913D547B...

Name and Title: Hershel Becker Chief Procurement Officer

Date: 12/18/2017 | 11:16 AM CST