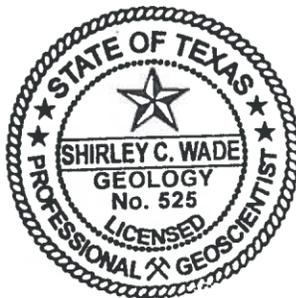

GAM RUN 15-001: TRINITY GLEN ROSE GROUNDWATER CONSERVATION DISTRICT MANAGEMENT PLAN

by Shirley C. Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Resources Division
Groundwater Availability Modeling Section
(512) 936-0883
February 17, 2015



Shirley C. Wade 2/17/15

This page is intentionally blank

GAM RUN 15-001: TRINITY GLEN ROSE GROUNDWATER CONSERVATION DISTRICT MANAGEMENT PLAN

by Shirley C. Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Resources Division
Groundwater Availability Modeling Section
(512) 936-0883
February 17, 2015

EXECUTIVE SUMMARY:

Texas State Water Code, Section 36.1071, Subsection (h) (Texas Water Code, 2011), states that, in developing its groundwater management plan, a groundwater conservation district shall use groundwater availability modeling information provided by the executive administrator of the Texas Water Development Board (TWDB) in conjunction with any available site-specific information provided by the district for review and comment to the executive administrator. Information derived from groundwater availability models that shall be included in the groundwater management plan includes:

- the annual amount of recharge from precipitation to the groundwater resources within the district, if any;
- for each aquifer within the district, the annual volume of water that discharges from the aquifer to springs and any surface water bodies, including lakes, streams, and rivers; and
- the annual volume of flow into and out of the district within each aquifer and between aquifers in the district.

This report—Part 2 of a two-part package of information from the TWDB to the Trinity Glen Rose Groundwater Conservation District—fulfills the requirements noted above. Part 1 of the two-part package is the Estimated Historical Water Use/State Water Plan data report. The District will receive this data report from the TWDB Groundwater Technical Assistance Section. Questions about the data report can be directed to Mr. Stephen Allen, stephen.allen@twdb.texas.gov, (512) 463-7317.

The groundwater management plan for the Trinity Glen Rose Groundwater Conservation District should be adopted by the district on or before September 15, 2015 and submitted to the executive administrator of the TWDB on or before October 15, 2015. The current management plan for the Trinity Glen Rose Groundwater Conservation District expires on December 14, 2015.

This report discusses the methods, assumptions, and results from a model run using the groundwater availability model for the Hill Country portion of the Trinity Aquifer System (Jones and others, 2009). Please note that the Edwards (Balcones Fault Zone) Aquifer occurs within the boundaries of the Trinity Glen Rose Groundwater Conservation District but is excluded from this report because the Trinity Glen Rose Groundwater Conservation District does not have jurisdiction over that aquifer. This model run replaces the results of GAM Run 09-032 (Aschenbach, 2010). The groundwater district boundaries have changed since 2010 and GAM Run 15-001 meets current standards set after the release of GAM Run 09-032. In addition, groundwater flow between the Trinity Aquifer System and the Edwards (Balcones Fault Zone) Aquifer was not reported in GAM Run 09-032.

Table 1 summarizes the groundwater availability model data required by statute, and Figure 1 shows the area of the model from which the values in Table 1 were extracted. If after review of the figure, the Trinity Glen Rose Groundwater Conservation District determines that the district boundaries used in the assessment do not reflect current conditions, please notify the TWDB at your earliest convenience.

The Trinity Aquifer underlies the Edwards (Balcones Fault Zone) Aquifer in the southeast parts of the Trinity Glen Rose Groundwater Conservation District (Figure 1). However, that part of the Trinity Aquifer is not included in the groundwater availability model for the Hill Country portion of the Trinity Aquifer System. Information for the Trinity Aquifer underlying the Edwards (Balcones Fault Zone) Aquifer is being provided separately from the Groundwater Technical Assistance Section of the TWDB.

METHODS:

In accordance with the provisions of the Texas State Water Code, Section 36.1071, Subsection (h), the groundwater availability model for the Hill Country portion of the Trinity Aquifer System (Jones and others, 2009) was run for this analysis. Trinity Glen Rose Groundwater Conservation District water budgets were extracted for the historical model period (1980 through 1997) using ZONEBUDGET Version 3.01 (Harbaugh, 2009). The average annual water budget values for recharge, discharge to

surface waterbodies, inflow to the district, outflow from the district, net inter-aquifer flow (upper), and net inter-aquifer flow (lower) for the portion of the aquifer located within the district is summarized in this report.

PARAMETERS AND ASSUMPTIONS:

Hill Country portion of the Trinity Aquifer System

- Version 2.01 of the groundwater availability model for the Hill Country portion of the Trinity Aquifer System was used for this analysis. See Jones and others (2009) for assumptions and limitations of the groundwater availability model.
- This groundwater availability model includes four layers, which represent the Edwards Group of the Edwards-Trinity (Plateau) Aquifer (Layer 1), the Upper Trinity Aquifer (Layer 2), the Middle Trinity Aquifer (Layer 3), and the Lower Trinity Aquifer (Layer 4).
- An overall water budget for the Trinity Glen Rose Groundwater Conservation District was determined for the Hill Country portion of the Trinity Aquifer System (Layers 2 through 4 collectively for the portions of the model that represent the Trinity Aquifer System).
- The model was run with MODFLOW-96 (Harbaugh and McDonald, 1996).

RESULTS:

A groundwater budget summarizes the amount of water entering and leaving the aquifer according to the groundwater availability model. Selected groundwater budget components listed below were extracted from the model results for the aquifers located within the district and averaged over the duration of the calibration and verification portion of the model run in the district, as shown in Table 1.

- Precipitation recharge—The areally distributed recharge sourced from precipitation falling on the outcrop areas of the aquifers (where the aquifer is exposed at land surface) within the district.
- Surface water outflow—The total water discharging from the aquifer (outflow) to surface water features such as streams, reservoirs, and springs.
- Flow into and out of district—The lateral flow within the aquifer between the district and adjacent counties.

- Flow between aquifers—The net vertical flow between the aquifer and adjacent aquifers or confining units. This flow is controlled by the relative water levels in each aquifer or confining unit and aquifer properties of each aquifer or confining unit that define the amount of leakage that occurs.

It is important to note that sub-regional water budgets are not exact. This is due to the size of the model cells and the approach used to extract data from the model. To avoid double accounting, a model cell that straddles a political boundary, such as a district or county boundary, is assigned to one side of the boundary based on the location of the centroid of the model cell. For example, if a cell contains two counties, the cell is assigned to the county where the centroid of the cell is located.

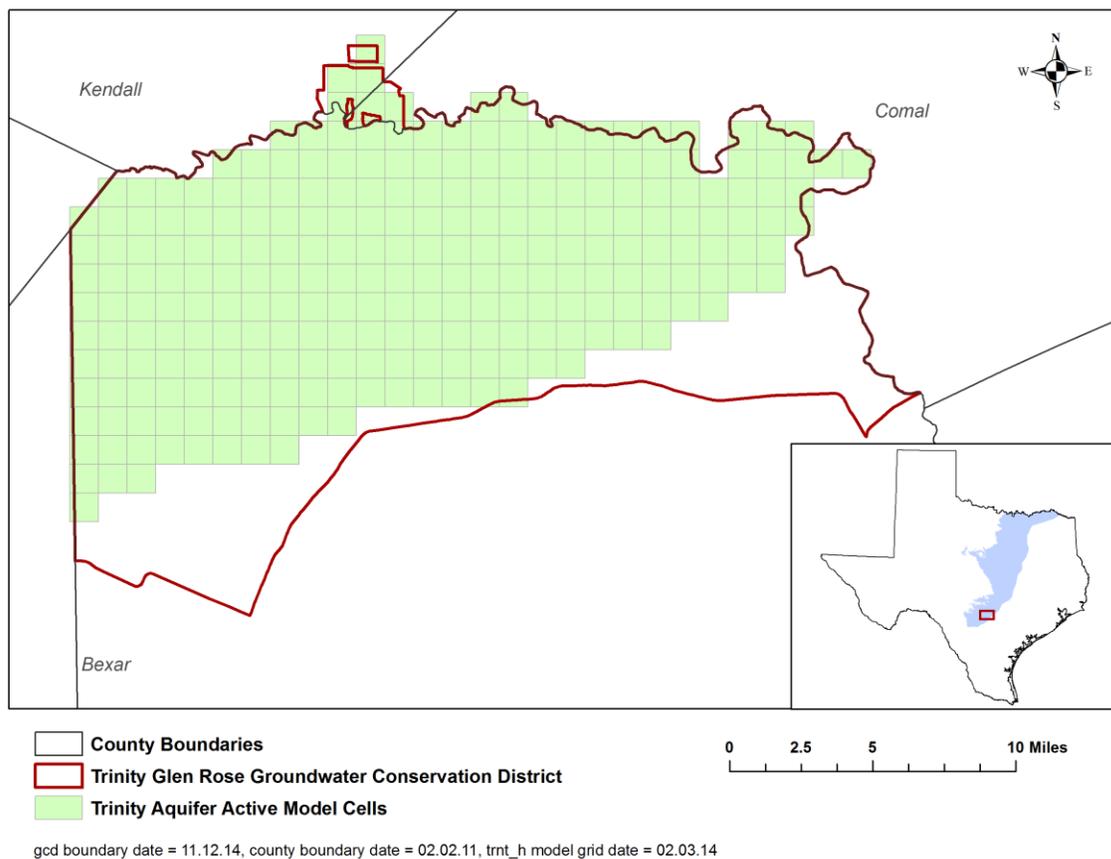


FIGURE 1: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE HILL COUNTRY PORTION OF THE TRINITY AQUIFER SYSTEM FROM WHICH THE INFORMATION IN TABLE 1 WAS EXTRACTED (THE TRINITY AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

TABLE 1: SUMMARIZED INFORMATION FOR THE HILL COUNTRY PORTION OF THE TRINITY AQUIFER SYSTEM THAT IS NEEDED FOR THE TRINITY GLEN ROSE GROUNDWATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

<i>Management Plan requirement</i>	<i>Aquifer or confining unit</i>	<i>Results</i>
Estimated annual amount of recharge from precipitation to the district	Trinity Aquifer	42,171
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Trinity Aquifer	9,892
Estimated annual volume of flow into the district within each aquifer in the district	Trinity Aquifer	35,193
Estimated annual volume of flow out of the district within each aquifer in the district	Trinity Aquifer	26,170
Estimated net annual volume of flow between each aquifer in the district	From the Trinity Aquifer to the Edwards (Balcones Fault Zone) Aquifer.	37,272

LIMITATIONS:

The groundwater model(s) used in completing this analysis is the best available scientific tool that can be used to meet the stated objective(s). To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historic groundwater flow conditions includes the assumptions about the location in the aquifer where historic pumping was placed. Understanding the amount and location of historic pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and interaction with streams are specific to particular historic time periods.

Because the application of the groundwater models was designed to address regional scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations related to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and overall conditions of the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historic precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

REFERENCES:

- Aschenbach, E. M., 2010, GAM Run 09-032: Texas Water Development Board, GAM Run 09-032 Report, 7 p.,
<http://www.twdb.texas.gov/groundwater/docs/GAMruns/GR09-32.pdf>.
- Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models, U.S. Geological Survey Groundwater Software.
- Harbaugh, A. W., and McDonald, M. G., 1996, User's documentation for MODFLOW-96, an update to the U.S. Geological Survey modular finite-difference groundwater-water flow model: U.S. Geological Survey Open-File Report 96-485, 56 p.
- Jones, Ian. C., Anaya, R. and Wade, S., 2009, Groundwater Availability Model for the Hill County Portion of the Aquifer System, Texas: Numerical Simulations through 1999- Model Report, 196 p.,
http://www.twdb.texas.gov/groundwater/models/gam/trnt_h/TRNT_H_2009_Update_Model_Report.pdf.
- National Research Council, 2007, Models in Environmental Regulatory Decision Making Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p.,
http://www.nap.edu/catalog.php?record_id=11972.
- Texas Water Code, 2011,
<http://www.statutes.legis.state.tx.us/docs/WA/pdf/WA.36.pdf>