

GAM RUN 21-004: MENARD COUNTY UNDERGROUND WATER DISTRICT MANAGEMENT PLAN

Shirley Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Modeling Department
(512) 936-0883
October 8, 2021



Shirley C. Wade
10/8/2021

This page is intentionally blank

GAM RUN 21-004: MENARD COUNTY UNDERGROUND WATER DISTRICT MANAGEMENT PLAN

Shirley Wade, Ph.D., P.G.
Texas Water Development Board
Groundwater Division
Groundwater Modeling Department
(512) 936-0883
October 8, 2021

EXECUTIVE SUMMARY:

Texas State Water Code, Section 36.1071, Subsection (h) (Texas Water Code, 2011), states that, in developing its groundwater management plan, a groundwater conservation district shall use groundwater availability modeling information provided by the Executive Administrator of the Texas Water Development Board (TWDB) in conjunction with any available site-specific information provided by the district for review and comment to the Executive Administrator.

The TWDB provides data and information to the Menard County Underground Water District in two parts. Part 1 is the Estimated Historical Water Use/State Water Plan dataset report, which will be provided to you separately by the TWDB Groundwater Technical Assistance Department. Please direct questions about the water data report to Mr. Stephen Allen at 512-463-7317 or stephen.allen@twdb.texas.gov. Part 2 is the required groundwater availability modeling information and this information includes:

1. the annual amount of recharge from precipitation, if any, to the groundwater resources within the district;
2. for each aquifer within the district, the annual volume of water that discharges from the aquifer to springs and any surface-water bodies, including lakes, streams, and rivers; and
3. the annual volume of flow into and out of the district within each aquifer and between aquifers in the district.

The groundwater management plan for the Menard County Underground Water District should be adopted by the district on or before March 1, 2022 and submitted to the executive administrator of the TWDB on or before March 31, 2022. The current management plan for the Menard County Underground Water District expires on May 30, 2022.

We used two groundwater availability models to estimate the management plan information for the aquifers within the Menard County Underground Water District. Information for the Hickory and Ellenburger-San Saba aquifers is from version 1.01 of the groundwater availability model for the minor aquifers of the Llano Uplift Region (Shi and others, 2016a and b). Information for the Edwards-Trinity (Plateau) Aquifer is from version 1.01 of the groundwater availability model for the Edwards-Trinity (Plateau) Aquifer (Anaya and Jones, 2009).

This report replaces the results of GAM Run 17-028 (Boghici and Shi, 2017), as the approach used for analyzing model results has been since refined to more accurately delineate flows between hydraulically connected units and because of updates to the spatial grid file used to define county, groundwater conservation district, and aquifer boundaries. In addition, this analysis includes results from the final groundwater availability model for the minor aquifers of the Llano Uplift Region, whereas only the draft model was available at the time of publication for GAM Run 17-028. Tables 1 through 3 summarize the groundwater availability model data required by statute. Figures 1, 3, and 5 show the area of the models from which the values in the tables were extracted. Figures 2, 4, and 6 provide generalized diagrams of the groundwater flow components provided in Tables 1 through 3. If, after review of the figures, the Menard County Underground Water District determines that the district boundaries used in the assessment do not reflect current conditions, please notify the TWDB at your earliest convenience.

METHODS:

In accordance with the provisions of the Texas State Water Code, Section 36.1071, Subsection (h), the groundwater availability models mentioned above were used to estimate information for the Menard County Underground Water District management plan. Water budgets were extracted for the historical model period for the Hickory and Ellenburger-San Saba aquifers (1981-2010) using ZONEBUDGET USG Version 1.00 (Panday and others, 2013). Water budgets were extracted for the historical model period for the Edwards-Trinity (Plateau) Aquifer (1981-2000) using ZONEBUDGET Version 3.01 (Harbaugh, 2009). The average annual water budget values for recharge, surface-water outflow, inflow to the district, outflow from the district, and the flow between aquifers within the district are summarized in this report.

PARAMETERS AND ASSUMPTIONS:

Hickory and Ellenburger-San Saba aquifers

- We used version 1.01 of the groundwater availability model for the minor aquifers in the Llano Uplift Region to analyze the Hickory and Ellenburger-San Saba aquifers. See Shi and others (2016a and b) for assumptions and limitations of the model.
- The groundwater availability model for the minor aquifers in the Llano Uplift Region contains eight layers (from top to bottom):
 - Layer 1 — Cretaceous age and younger water-bearing units
 - Layer 2 — Permian and Pennsylvanian age confining units
 - Layer 3 — the Marble Falls Aquifer and equivalent
 - Layer 4 — Mississippian age confining units
 - Layer 5 — the Ellenburger-San Saba Aquifer and equivalent
 - Layer 6 — Cambrian age confining units
 - Layer 7 — the Hickory Aquifer and equivalent, and
 - Layer 8 — Precambrian age confining units
- Individual water budgets for the district were determined for the Ellenburger-San Saba Aquifer (Layer 5) and the Hickory Aquifer (Layer 7). The Marble Falls Aquifer does not occur within the Menard County Underground Water District and therefore no groundwater budget values are included for it in this report.
- Water budget terms were averaged for the period 1981 to 2010 (stress periods 2 through 31)
- The model was run with MODFLOW-USG (Panday and others, 2013).

Edwards-Trinity (Plateau) Aquifer

- We used version 1.01 of the groundwater availability model for the Edwards-Trinity (Plateau) and Pecos Valley aquifers to analyze the Edwards-Trinity (Plateau) Aquifer. See Anaya and Jones (2009) for assumptions and limitations of the model.
- The groundwater availability model for the Edwards-Trinity (Plateau) and Pecos Valley aquifers contains two layers. Within Menard County Underground Water District, these generally represent the Edwards Group and equivalent limestone hydrostratigraphic units of the Edwards-Trinity (Plateau) Aquifer (Layer 1) and the undifferentiated Trinity Group hydrostratigraphic units or equivalent units of the Edwards-Trinity (Plateau) Aquifer (Layer 2).
- An Individual water budget for the district was determined for the Edwards-Trinity (Plateau) Aquifer (Layers 1 and 2, combined). The Pecos Valley Aquifer does not occur within the Menard County Underground Water District and therefore no groundwater budget values are included for it in this report.
- Water budget terms were averaged for the period 1981 to 2000 (stress periods 2 through 21)
- The model was run with MODFLOW-96 (Harbaugh and McDonald, 1996).

RESULTS:

A groundwater budget summarizes the amount of water entering and leaving the aquifer according to the groundwater availability model. Selected groundwater budget components listed below were extracted from the groundwater availability model results for the Hickory, Ellenburger-San Saba, and Edwards-Trinity (Plateau) aquifers located within the Menard County Underground Water District and averaged over the historical calibration periods, as shown in Tables 1 through 3.

1. Precipitation recharge—the areally distributed recharge sourced from precipitation falling on the outcrop areas of the aquifers (where the aquifer is exposed at land surface) within the district.
2. Surface-water outflow—the total water discharging from the aquifer (outflow) to surface-water features such as streams, reservoirs, and springs.

3. Flow into and out of district—the lateral flow within the aquifer between the district and adjacent counties.
4. Flow between aquifers—the net vertical flow between the aquifer and adjacent aquifers or confining units. This flow is controlled by the relative water levels in each aquifer and aquifer properties of each aquifer or confining unit that define the amount of leakage that occurs.

The information needed for the district's management plan is summarized in Tables 1 through 3. It is important to note that sub-regional water budgets are not exact. This is due to the size of the model cells and the approach used to extract data from the model. To avoid double accounting, a model cell that straddles a political boundary, such as a district or county boundary, is assigned to one side of the boundary based on the location of the centroid of the model cell. For example, if a cell contains two counties, the cell is assigned to the county where the centroid of the cell is located.

TABLE 1: SUMMARIZED INFORMATION FOR THE HICKORY AQUIFER THAT IS NEEDED FOR THE MENARD COUNTY UNDERGROUND WATER DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Hickory Aquifer	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Hickory Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Hickory Aquifer	1,723
Estimated annual volume of flow out of the district within each aquifer in the district	Hickory Aquifer	4,202
Estimated net annual volume of flow between each aquifer in the district	Into the Hickory Aquifer from equivalent units outside the official Hickory Aquifer extent	299
	Into the Hickory Aquifer from the Cambrian age confining unit	2,446
	From the Hickory Aquifer to the Precambrian age confining unit	219


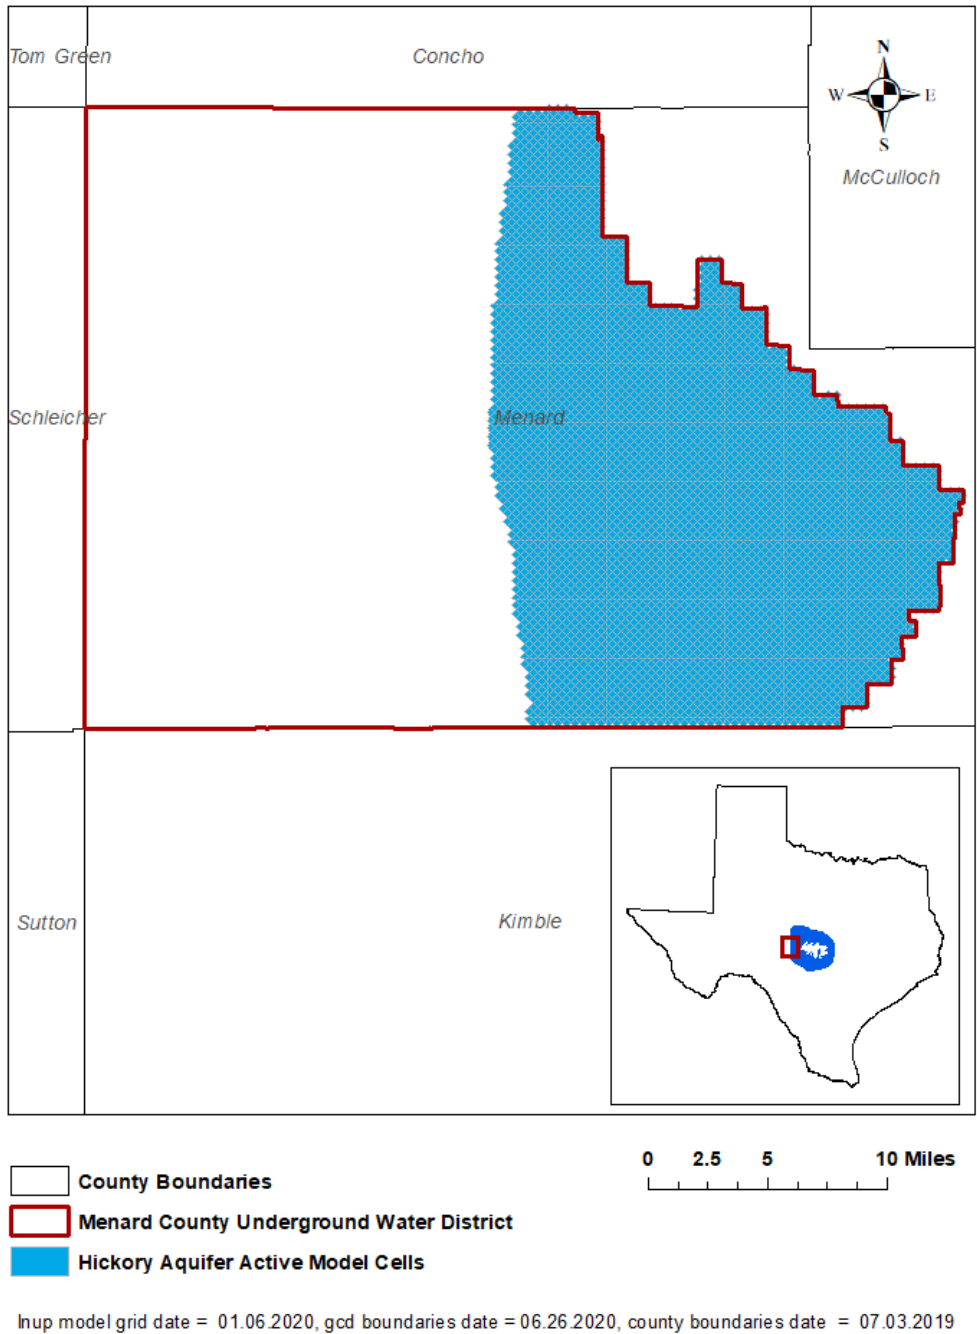


FIGURE 1: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE MINOR AQUIFERS IN THE LLANO UPLIFT REGION FROM WHICH THE INFORMATION IN TABLE 1 WAS EXTRACTED (THE HICKORY AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

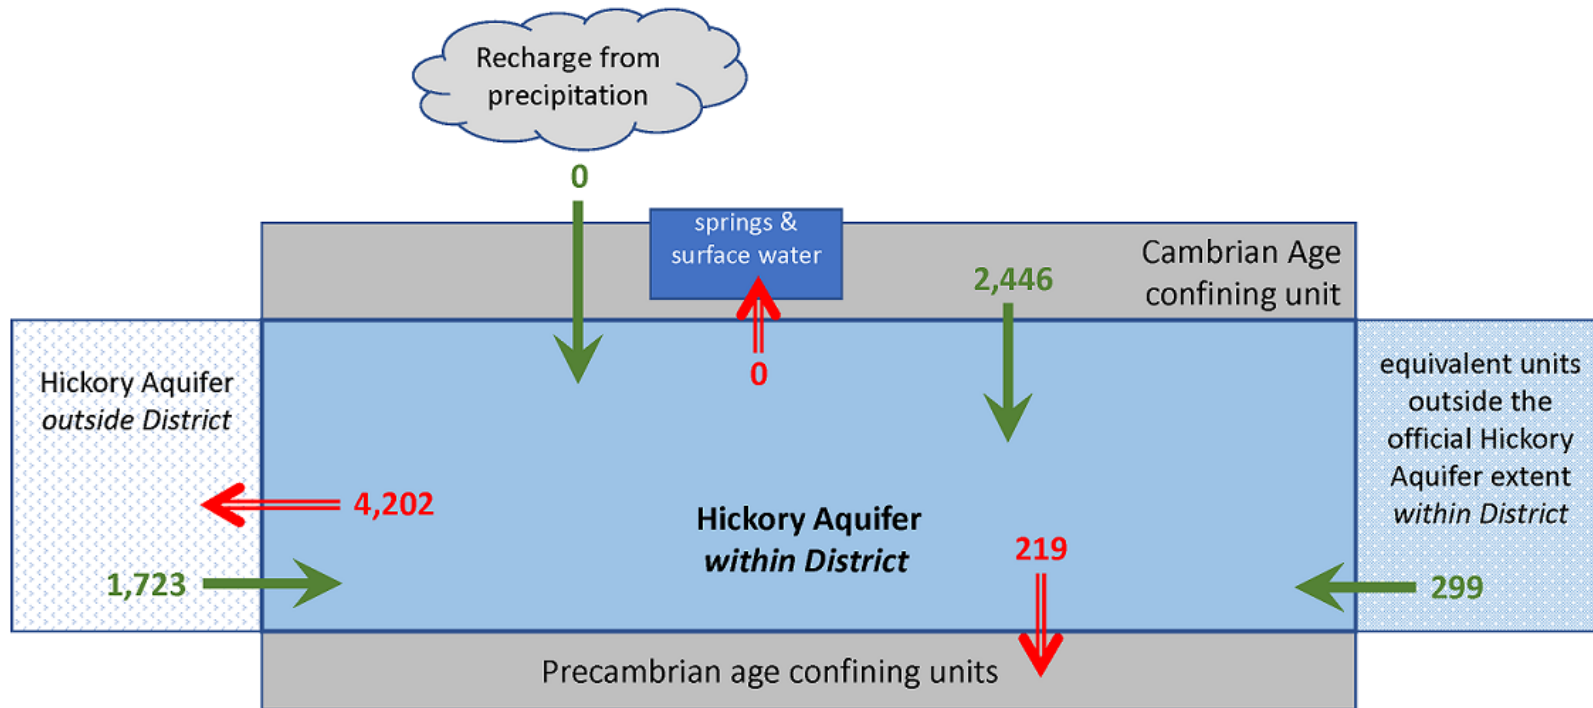


Caveat: This diagram only includes the water budget items provided in Table 1. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 2: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 1, REPRESENTING DIRECTIONS OF FLOW FOR THE HICKORY AQUIFER WITHIN MENARD COUNTY UNDERGROUND WATER DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR.


TABLE 2: SUMMARIZED INFORMATION FOR THE ELLENBURGER-SAN SABA AQUIFER THAT IS NEEDED FOR THE MENARD COUNTY UNDERGROUND WATER DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.

Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Ellenburger-San Saba Aquifer	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Ellenburger-San Saba Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Ellenburger-San Saba Aquifer	126
Estimated annual volume of flow out of the district within each aquifer in the district	Ellenburger-San Saba Aquifer	269
Estimated net annual volume of flow between each aquifer in the district	Into the Ellenburger-San Saba Aquifer from equivalent units outside the official Ellenburger-San Saba Aquifer extent	151
	Into the Ellenburger-San Saba Aquifer from Marble Falls equivalent units outside the official Marble Falls Aquifer extent	41
	Into the Ellenburger-San Saba Aquifer from the Mississippian age confining unit	1,427
	From the Ellenburger-San Saba Aquifer to Cambrian age confining units	1,468

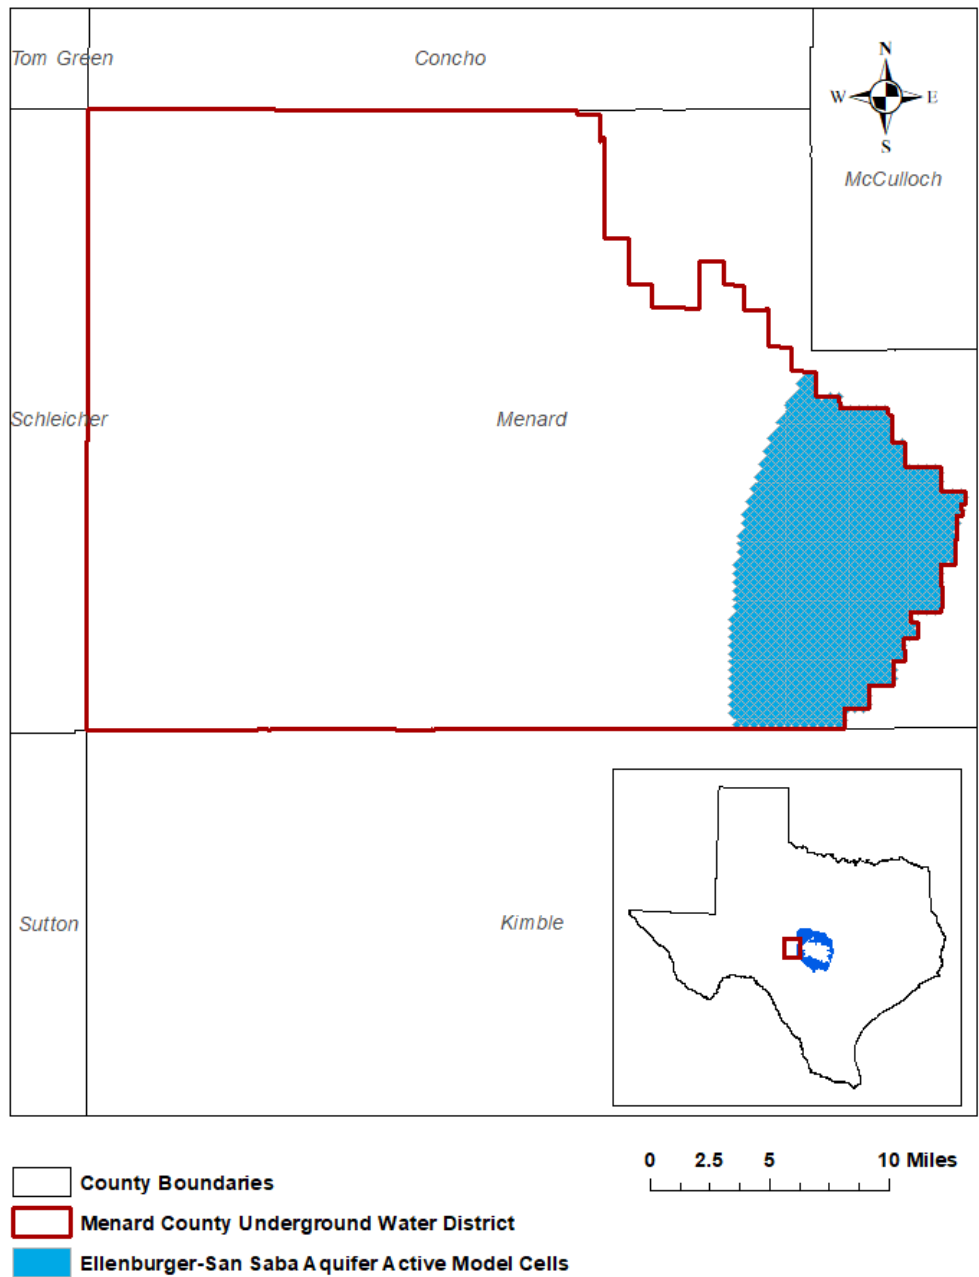

Inup model grid date = 01.06.2020, gcd boundaries date = 06.26.2020, county boundaries date = 07.03.2019

FIGURE 3: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE MINOR AQUIFERS IN THE LLANO UPLIFT REGION FROM WHICH THE INFORMATION IN TABLE 2 WAS EXTRACTED (THE ELLENBURGER-SAN SABA AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

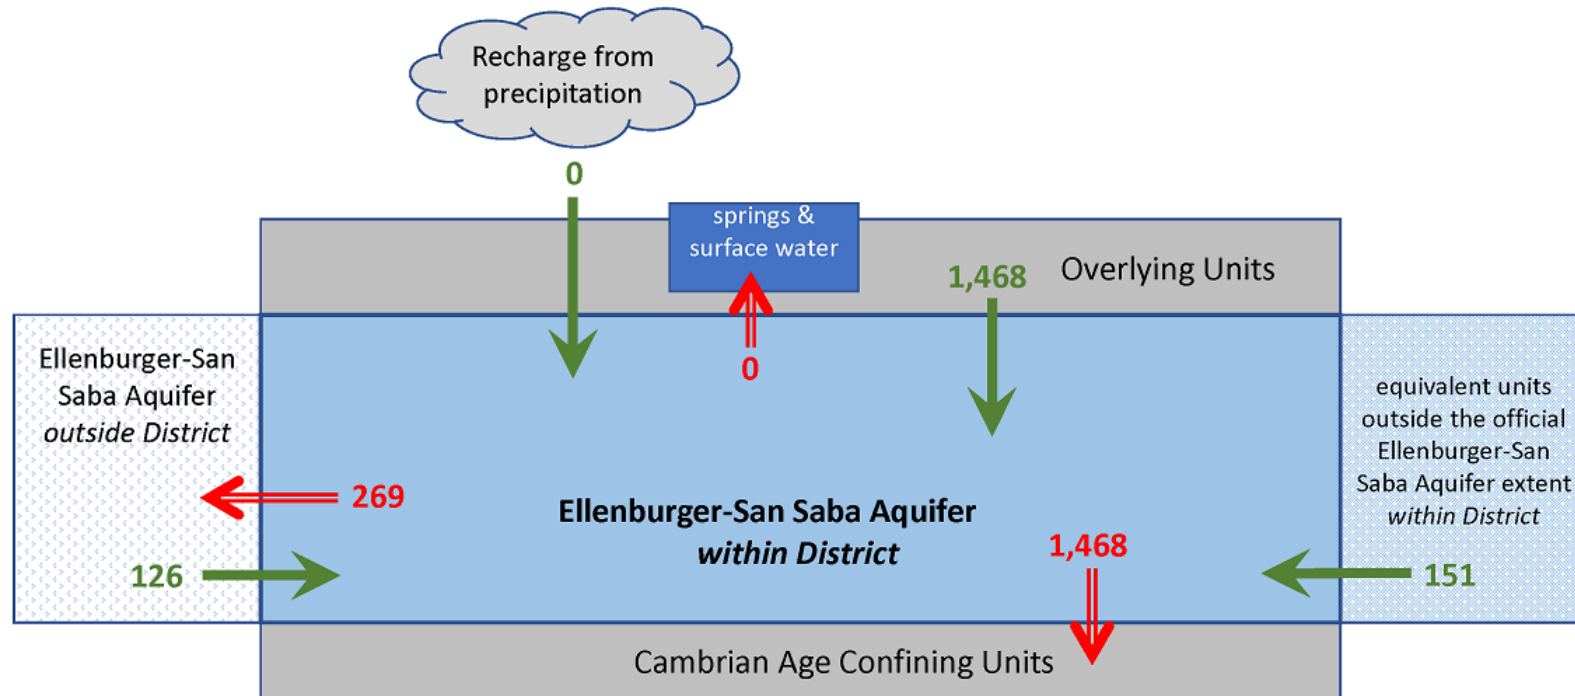

* Flow from overlying units includes 1,427 acre-feet per year from the Mississippian age confining unit and 41 acre-feet per year from the Marble Falls equivalent units outside the official Marble Falls Aquifer extent.


Caveat: This diagram only includes the water budget items provided in Table 2. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 4: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 2, REPRESENTING DIRECTIONS OF FLOW FOR THE ELLENBURGER-SAN SABA AQUIFER WITHIN MENARD COUNTY UNDERGROUND WATER DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR.

TABLE 3: SUMMARIZED INFORMATION FOR THE EDWARDS-TRINITY (PLATEAU) AQUIFER THAT IS NEEDED FOR THE MENARD COUNTY UNDERGROUND WATER DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT.


Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Edwards-Trinity (Plateau) Aquifer	19,408
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers.	Edwards-Trinity (Plateau) Aquifer	20,298
Estimated annual volume of flow into the district within each aquifer in the district	Edwards-Trinity (Plateau) Aquifer	10,106
Estimated annual volume of flow out of the district within each aquifer in the district	Edwards-Trinity (Plateau) Aquifer	10,113
Estimated net annual volume of flow between each aquifer in the district	From the Edwards-Trinity (Plateau) Aquifer to Pennsylvanian and Permian underlying confining units ¹	3,658

¹ Calculated from the groundwater availability model for the Minor Aquifers of the Llano Uplift Region of Texas. This value is only the fraction of the flux for the area of the Edwards-Trinity Plateau within the model area of the groundwater availability model for the Minor Aquifers of the Llano Uplift Region of Texas.

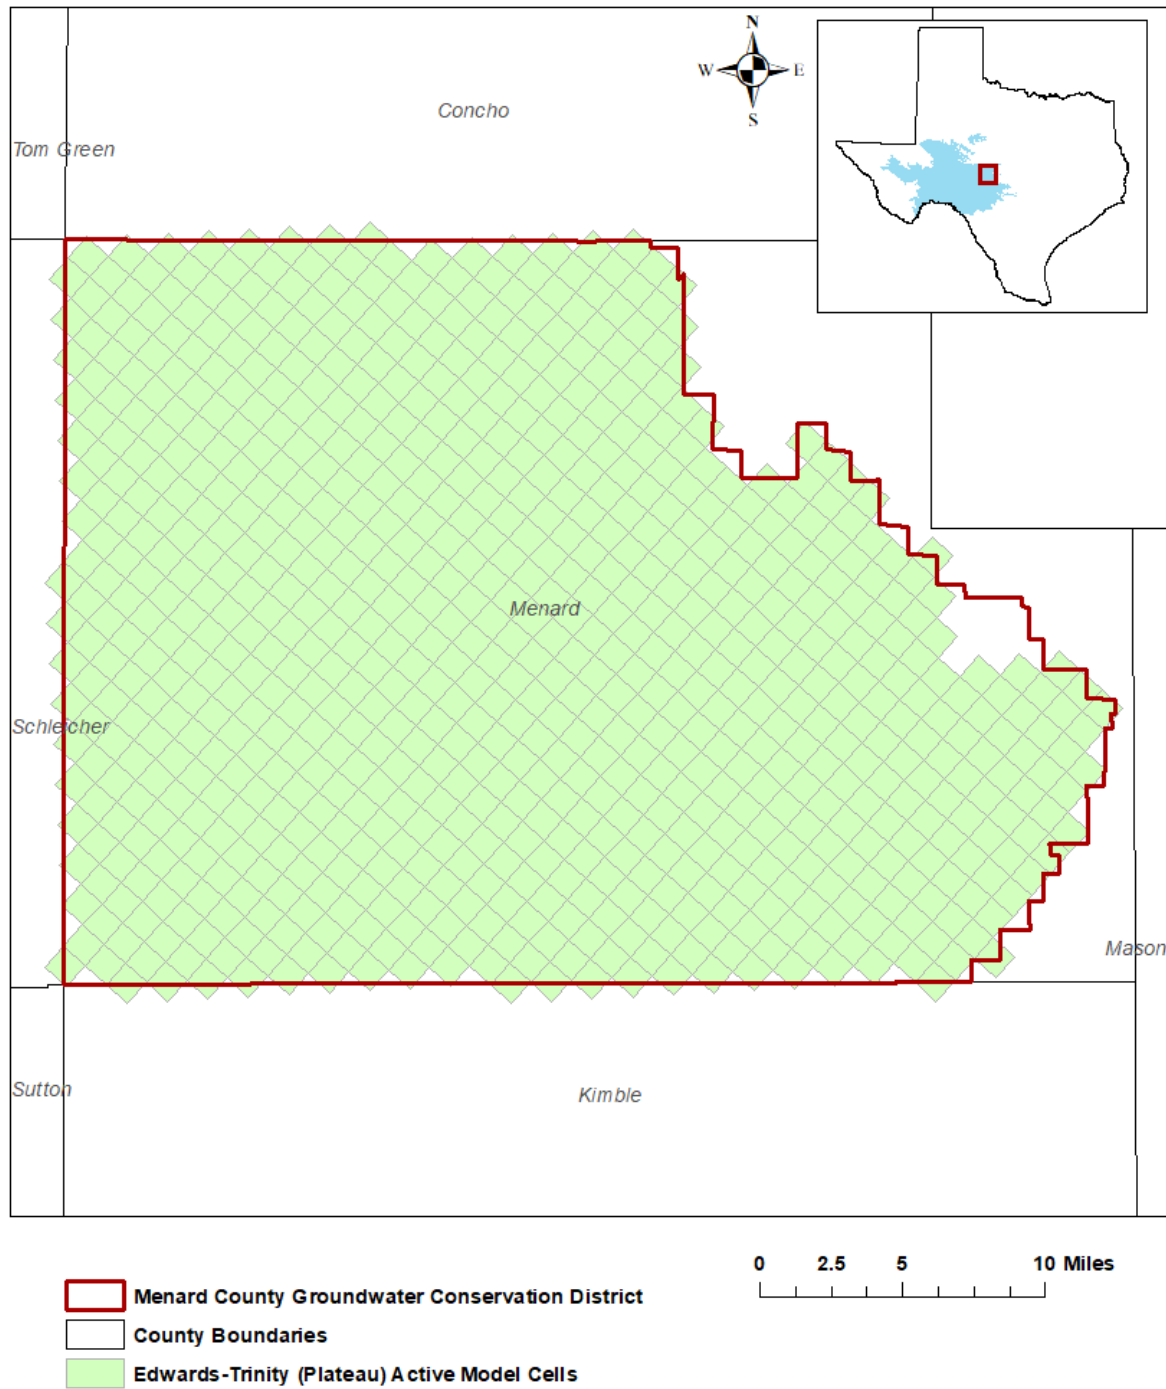

eddt_p model grid date = 01.06.2020, gcd boundaries date = 06.26.2020, county boundaries date = 07.03.2019

FIGURE 5: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE EDWARDS-TRINITY (PLATEAU) AND PECOS VALLEY AQUIFERS FROM WHICH THE INFORMATION IN TABLE 3 WAS EXTRACTED (THE EDWARDS-TRINITY (PLATEAU) AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).

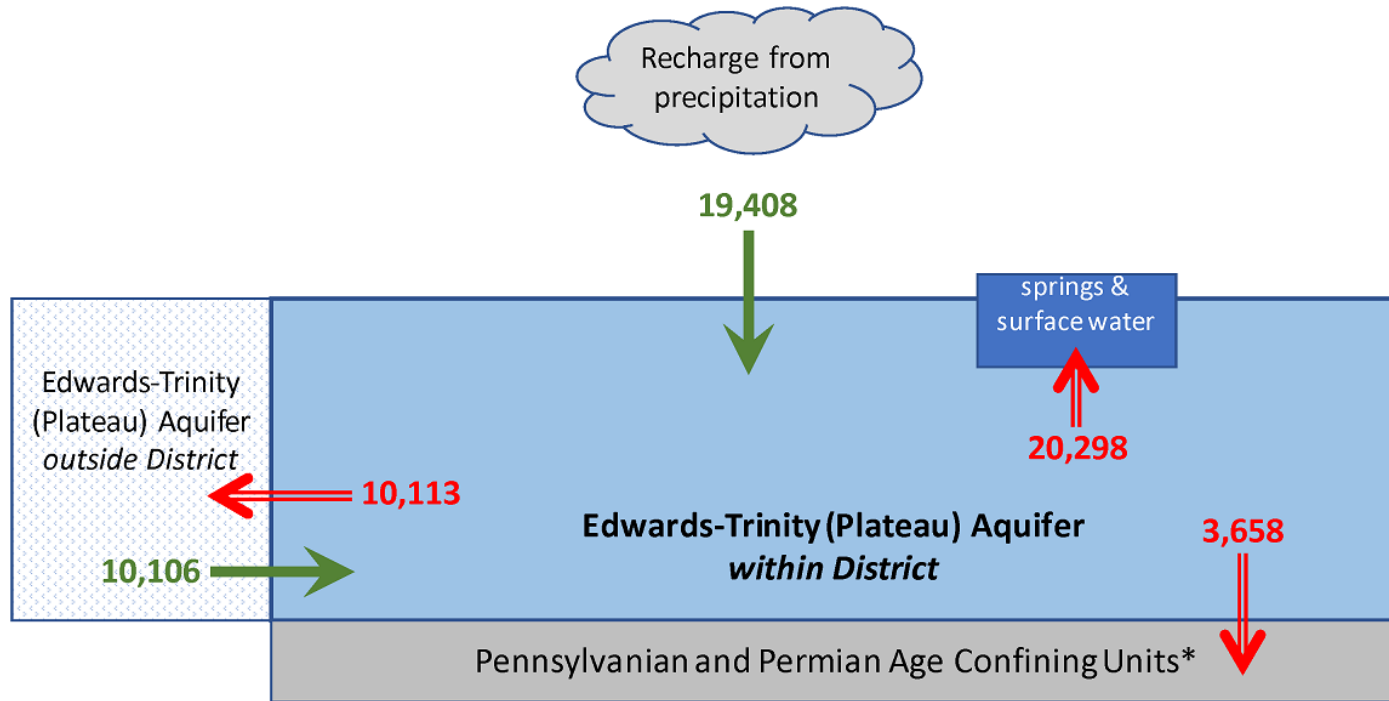

* Flow from the Edwards-Trinity (Plateau) Aquifer to Pennsylvanian and Permian age confining units based on the Groundwater Availability Model for the Minor Aquifers of the Llano Uplift Region of Texas.

Caveat: This diagram only includes the water budget items provided in Table 3. A complete water budget would include additional inflows and outflows. If the District requires values for additional water budget items, please contact TWDB.

FIGURE 6: GENERALIZED DIAGRAM OF THE SUMMARIZED BUDGET INFORMATION FROM TABLE 3, REPRESENTING DIRECTIONS OF FLOW FOR THE EDWARDS-TRINITY (PLATEAU) AQUIFER WITHIN MENARD COUNTY UNDERGROUND WATER DISTRICT. FLOW VALUES EXPRESSED IN ACRE-FEET PER YEAR.

LIMITATIONS:

The groundwater models used in completing this analysis are the best available scientific tools that can be used to meet the stated objectives. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”

A key aspect of using the groundwater model to evaluate historic groundwater flow conditions includes the assumptions about the location in the aquifer where historic pumping was placed. Understanding the amount and location of historical pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and interaction with streams are specific to particular historic time periods.

Because the application of the groundwater models was designed to address regional scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations related to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and overall conditions of the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historic precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

REFERENCES:

- Anaya, R., and Jones, I. C., 2009, Groundwater availability model for the Edwards-Trinity (Plateau) and Pecos Valley aquifers of Texas: Texas Water Development Board Report 373, 103 p.
http://www.twdb.texas.gov/groundwater/models/gam/eddt_p/ET-Plateau_Full.pdf
- Boghici, R. and Shi, J., 2017, GAM Run 17-028: Texas Water Development Board, GAM Run 17-028 Report, 15 p.,
<https://www.twdb.texas.gov/groundwater/docs/GAMruns/GR17-028.pdf>.
- Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models, U.S. Geological Survey Groundwater Software.
- Harbaugh, A. W., and McDonald, M. G., 1996, User's documentation for MODFLOW-96, an update to the U.S. Geological Survey modular finite-difference groundwater-water flow model: U.S. Geological Survey Open-File Report 96-485, 56 p.
- National Research Council, 2007, Models in Environmental Regulatory Decision Making Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p., http://www.nap.edu/catalog.php?record_id=11972.
- Panday, S., Langevin, C.D., Niswonger, R.G., Ibaraki, M., and Hughes, J.D., 2013, MODFLOW USG version 1: An unstructured grid version of MODFLOW for simulating groundwater flow and tightly coupled processes using a control volume finite-difference formulation: U.S. Geological Survey Techniques and Methods, book 6, chap. A45, 66p., <https://pubs.usgs.gov/tm/06/a45/>.
- Shi, J., Boghici, R., Kohlrenken, W., and Hutchison, W.R., 2016a, Conceptual Model Report: Minor Aquifers of the Llano Uplift Region of Texas. Texas Water Development Board Report, 306 p.,
http://www.twdb.texas.gov/groundwater/models/gam/llano/Llano_Uplift_Conceptual_Model_Report_Final.pdf.
- Shi, J., Boghici, R., Kohlrenken, W., and Hutchison, W.R., 2016b, Numerical Model Report: Minor Aquifers of the Llano Uplift Region of Texas (Marble Falls, Ellenburger-San Saba, and Hickory). Texas Water Development Board Report, 435 p.,
http://www.twdb.texas.gov/groundwater/models/gam/llano/Llano_Uplift_Numerical_Model_Report_Final.pdf.
- Texas Water Code, 2011, <http://www.statutes.legis.state.tx.us/docs/WA/pdf/WA.36.pdf>