


---

# GAM RUN 17-013: IRION COUNTY WATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN

Radu Boghici, P.G.  
Texas Water Development Board  
Groundwater Division  
Groundwater Availability Modeling Section  
(512) 463-5808  
August 15, 2017

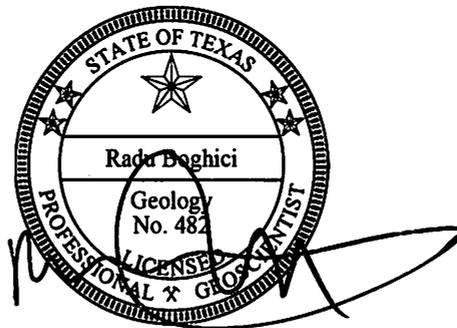

8/15/2017

*This page is intentionally blank.*

---

# **GAM RUN 17-013: IRION COUNTY WATER CONSERVATION DISTRICT GROUNDWATER MANAGEMENT PLAN**

Radu Boghici, P.G.  
Texas Water Development Board  
Groundwater Division  
Groundwater Availability Modeling Section  
(512) 463-5808  
August 15, 2017

## *EXECUTIVE SUMMARY:*

Texas State Water Code, Section 36.1071, Subsection (h) (Texas Water Code, 2015), states that, in developing its groundwater management plan, a groundwater conservation district shall use groundwater availability modeling information provided by the Executive Administrator of the Texas Water Development Board (TWDB) in conjunction with any available site-specific information provided by the district for review and comment to the Executive Administrator.

The TWDB provides data and information to the Irion County Water Conservation District in two parts. Part 1 is the Estimated Historical Water Use/State Water Plan dataset report, which will be provided to you separately by the TWDB Groundwater Technical Assistance Section. Please direct questions about the water data report to Mr. Stephen Allen at (512) 463-7317 or [stephen.allen@twdb.texas.gov](mailto:stephen.allen@twdb.texas.gov). Part 2 is the required groundwater availability modeling information and this information includes

1. the annual amount of recharge from precipitation, if any, to the groundwater resources within the district;
2. for each aquifer within the district, the annual volume of water that discharges from the aquifer to springs and any surface-water bodies, including lakes, streams, and rivers; and
3. the annual volume of flow into and out of the district within each aquifer and between aquifers in the district.

The groundwater management plan for the Irion County Water Conservation District should be adopted by the district on or before May 28, 2018, and submitted to the Executive Administrator of the TWDB on or before June 27, 2018. The current management plan for Irion County Water Conservation District expires on August 26, 2018.

We used version 1.01 of the groundwater availability model for Edwards-Trinity (Plateau) Aquifer (Anaya and Jones, 2009), version 1.01 of the groundwater availability model for the Lipan Aquifer, and version 1.01 of the groundwater availability model for the High Plains Aquifer System to estimate the management plan information for the aquifers within Irion County Water Conservation District. This report replaces the results of GAM Run 12-017. GAM Run 17-013 meets current standards set after the release of GAM Run 12-017 and includes results for the Dockum Aquifer from the recently released groundwater availability model for the High Plains Aquifer System (Deeds and Jigmond, 2015). Tables 1 through 3 summarize the groundwater availability model data required by the statute, and Figures 1 through 3 show the area of the models from which the values in the tables were extracted. If, after review of this report, the Irion County Water Conservation District determines that the district boundaries used in the assessment do not reflect current conditions, please notify the TWDB at your earliest convenience.

#### ***METHODS:***

In accordance with the provisions of the Texas State Water Code, Section 36.1071, Subsection (h), we ran the groundwater availability models for the Edwards-Trinity (Plateau) Aquifer, Lipan Aquifer, and High Plains Aquifer System for this analysis. We extracted water budgets for each year of the historical model periods (1981 through 2000 for the Edwards-Trinity (Plateau) Aquifer, 1980 through 1998 for the Lipan Aquifer, and 1980 through 2012 for the Dockum Aquifer) using ZONEBUDGET Version 3.01 (Harbaugh, 2009). Then we summarized in this report the average annual water budget values for recharge, surface water outflow, inflow to the district, outflow from the district, net inter-aquifer flow (upper), and net inter-aquifer flow (lower) for the portions of the aquifers located within the district.

#### ***PARAMETERS AND ASSUMPTIONS:***

##### ***Edwards-Trinity (Plateau) Aquifer***

- We used version 1.01 of the groundwater availability model for the Edwards-Trinity (Plateau) and Pecos Valley aquifers for this analysis. See Anaya and Jones (2009) for assumptions and limitations of the model. The Pecos Valley Aquifer does not occur within the Irion County Water Conservation District and therefore no groundwater budget values are included for it in this report.
- The groundwater availability model includes three layers, with Layer 1 representing the Edwards Group and associated limestone hydrostratigraphic

units and Layer 2 representing the undifferentiated Trinity Group hydrostratigraphic units. The lowermost layer, Layer 3, is inactive.

- Recharge rates are based on (1980 – 2000) precipitation (Anaya and Jones, 2009).
- The model was run with MODFLOW-96 (Harbaugh and McDonald, 1996).

### ***Lipan Aquifer***

- We used version 1.01 of the groundwater availability model for the Lipan Aquifer for this analysis. See Beach and others (2004) for assumptions and limitations of the model.
- The Lipan Aquifer model includes one layer representing the Quaternary Leona Formation, portions of the underlying Permian Formations, and the Edwards-Trinity (Plateau) Aquifer to the west, south, and north. The model does not include all of the aquifer within the district boundaries.
- The model uses general head boundaries to simulate the eastern and western aquifer boundaries. Inflow on the general-head boundary to the west represents inflow from the Edwards-Trinity (Plateau) Aquifer.
- Recharge rates are based on (1980 – 2000) precipitation (Beach and others, 2004).
- The model was run with MODFLOW-96 (Harbaugh and McDonald, 1996).

### ***Dockum Aquifer***

- We used version 1.01 of the groundwater availability model for the High Plains Aquifer System. See Deeds and Jigmond (2015) for assumptions and limitations of the model.
- The model was run with MODFLOW-NWT (Niswonger and others, 2011).
- The groundwater availability model for the High Plains Aquifer System contains four layers:
  - Layer 1—the Ogallala Aquifer and the Pecos Valley Alluvium Aquifer
  - Layer 2—the Rita Blanca Aquifer, the Edwards-Trinity (High Plains) Aquifer, the Edwards-Trinity (Plateau) Aquifer, and pass-through cells of the Dockum Aquifer

- Layer 3—the upper Dockum Group and pass-through cells of the lower Dockum Group
- Layer 4—the lower Dockum Group
- Perennial rivers and reservoirs were simulated using the MODFLOW-NWT river package. Springs, seeps, and draws were simulated using the MODFLOW-NWT drain package. For this analysis, groundwater discharge to surface water includes groundwater leakage to the river and drain packages.

### *RESULTS:*

A groundwater budget summarizes the amount of water entering and leaving the aquifers according to the groundwater availability model. Selected groundwater budget components listed below were extracted from the groundwater availability models for the Edwards-Trinity (Plateau) and Pecos Valley aquifers, for the Lipan Aquifer, and for the minor aquifers of the High Plains Aquifer System within Irion County Water Conservation District, and averaged over the historical calibration periods, as shown in Tables 1 through 3.

1. Precipitation recharge—the areally distributed recharge sourced from precipitation falling on the outcrop areas of the aquifers (where the aquifer is exposed at land surface) within the district.
2. Surface-water outflow—the total water discharging from the aquifer (outflow) to surface-water features such as streams, reservoirs, and springs.
3. Flow into and out of district—the lateral flow within the aquifer between the district and adjacent counties.
4. Flow between aquifers—the net vertical flow between the aquifer and adjacent aquifers or confining units. This flow is controlled by the relative water levels in each aquifer and aquifer properties of each aquifer or confining unit that define the amount of leakage that occurs.

The information needed for the district's management plan is summarized in Tables 1 through 3. It is important to note that sub-regional water budgets are not exact. This is due to the size of the model cells and the approach used to extract data from the model. To avoid double accounting, a model cell that straddles a political boundary, such as a district or county boundary, is assigned to one side of the boundary based on the location of the centroid of the model cell. For example, if a cell contains two counties, the cell is assigned to the county where the centroid of the cell is located.

**TABLE 1: SUMMARIZED INFORMATION FOR THE EDWARDS-TRINITY (PLATEAU) AQUIFER THAT IS NEEDED FOR IRION COUNTY WATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE FOOT. THESE FLOWS INCLUDE FRESH AND BRACKISH WATERS.**


<b>Management Plan requirement</b>	<b>Aquifer or confining unit</b>	<b>Results</b>
Estimated annual amount of recharge from precipitation to the district	Edwards-Trinity (Plateau) Aquifer	16,694
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Edwards-Trinity (Plateau) Aquifer	20,858
Estimated annual volume of flow into the district within each aquifer in the district	Edwards-Trinity (Plateau) Aquifer	10,544
Estimated annual volume of flow out of the district within each aquifer in the district	Edwards-Trinity (Plateau) Aquifer	5,618
Estimated net annual volume of flow between each aquifer in the district	From the Edwards-Trinity (Plateau) Aquifer into adjacent Lipan	1,002

**TABLE 2: SUMMARIZED INFORMATION FOR THE LIPAN AQUIFER THAT IS NEEDED FOR IRION COUNTY WATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE-FOOT. THESE FLOWS MAY INCLUDE FRESH AND BRACKISH WATERS. THE MODEL EXTENT DOES NOT COVER ALL OF THE LIPAN AQUIFER WITHIN THE DISTRICT BOUNDARIES.**


<b>Management Plan requirement</b>	<b>Aquifer or confining unit</b>	<b>Results</b>
Estimated annual amount of recharge from precipitation to the district	Lipan Aquifer	2,246
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Lipan Aquifer	0
Estimated annual volume of flow into the district within each aquifer in the district	Lipan Aquifer	230
Estimated annual volume of flow out of the district within each aquifer in the district	Lipan Aquifer	2,890
Estimated net annual volume of flow between each aquifer in the district	From the Edwards-Trinity (Plateau) Aquifer and other units into the Lipan Aquifer	4,288

**TABLE 3: SUMMARIZED INFORMATION FOR THE DOCKUM AQUIFER THAT IS NEEDED FOR IRION COUNTY WATER CONSERVATION DISTRICT'S GROUNDWATER MANAGEMENT PLAN. ALL VALUES ARE REPORTED IN ACRE-FEET PER YEAR AND ROUNDED TO THE NEAREST 1 ACRE FOOT. THESE FLOWS MAY INCLUDE FRESH AND BRACKISH WATERS.**


Management Plan requirement	Aquifer or confining unit	Results
Estimated annual amount of recharge from precipitation to the district	Dockum	0
Estimated annual volume of water that discharges from the aquifer to springs and any surface water body including lakes, streams, and rivers	Dockum	0
Estimated annual volume of flow into the district within each aquifer in the district	Dockum	151
Estimated annual volume of flow out of the district within each aquifer in the district	Dockum	17
Estimated net annual volume of flow between aquifers in the district	From Dockum Aquifer to Overlying Units	164

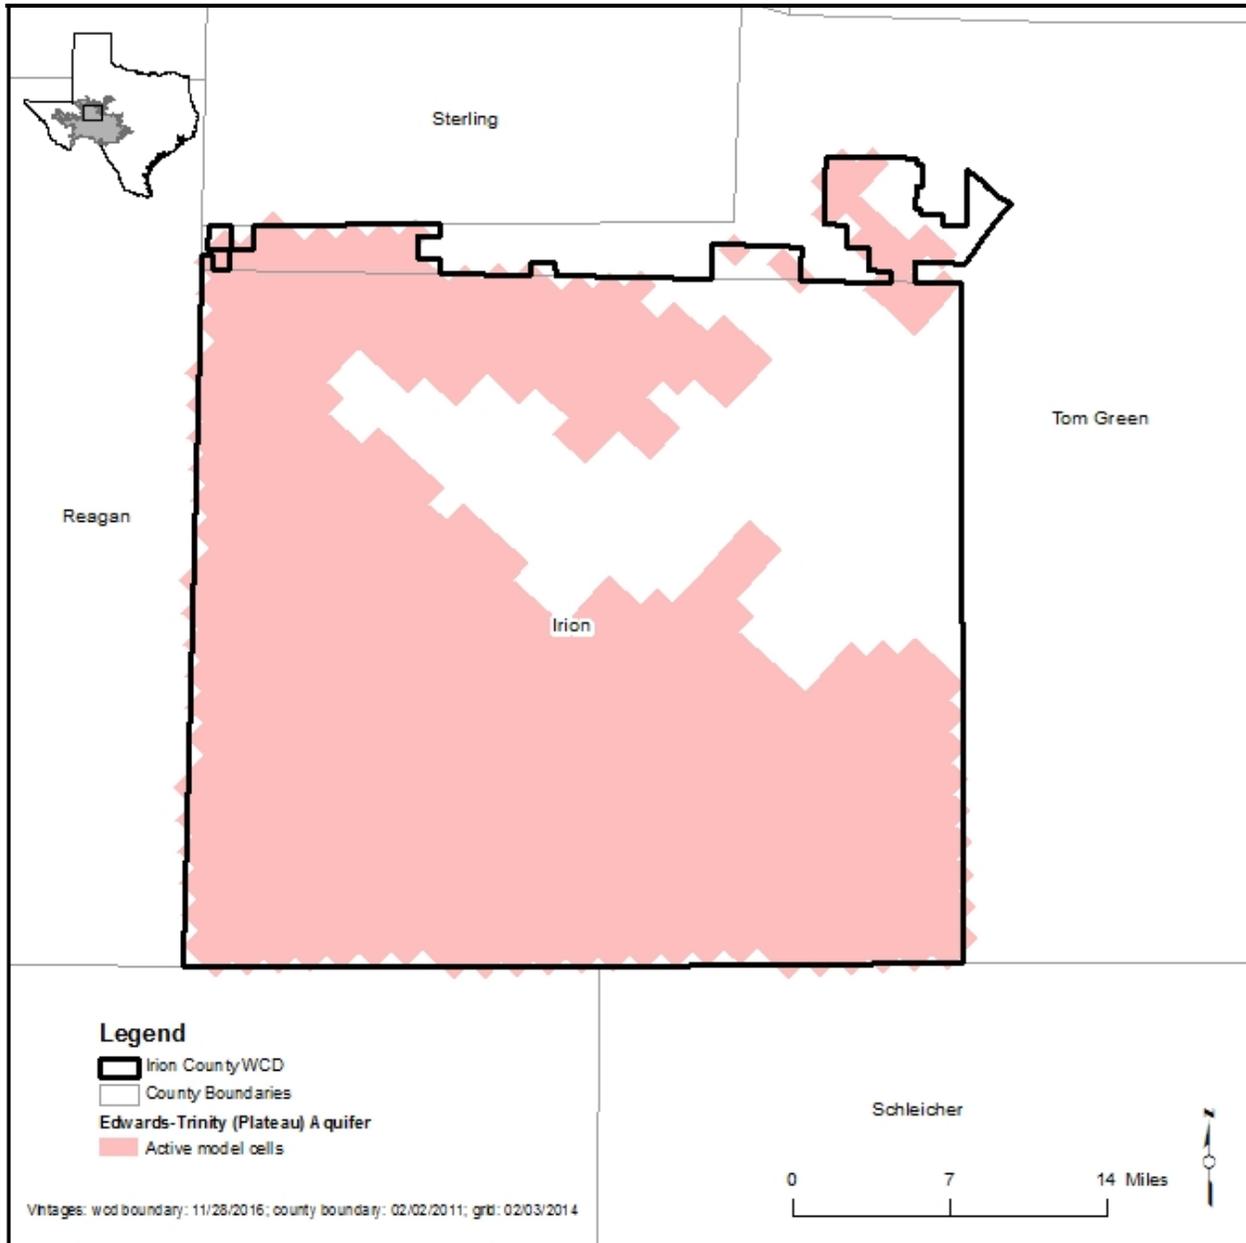

**FIGURE 1: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE EDWARDS-TRINITY (PLATEAU) AQUIFER FROM WHICH THE INFORMATION IN TABLE 1 WAS EXTRACTED (THE AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).**

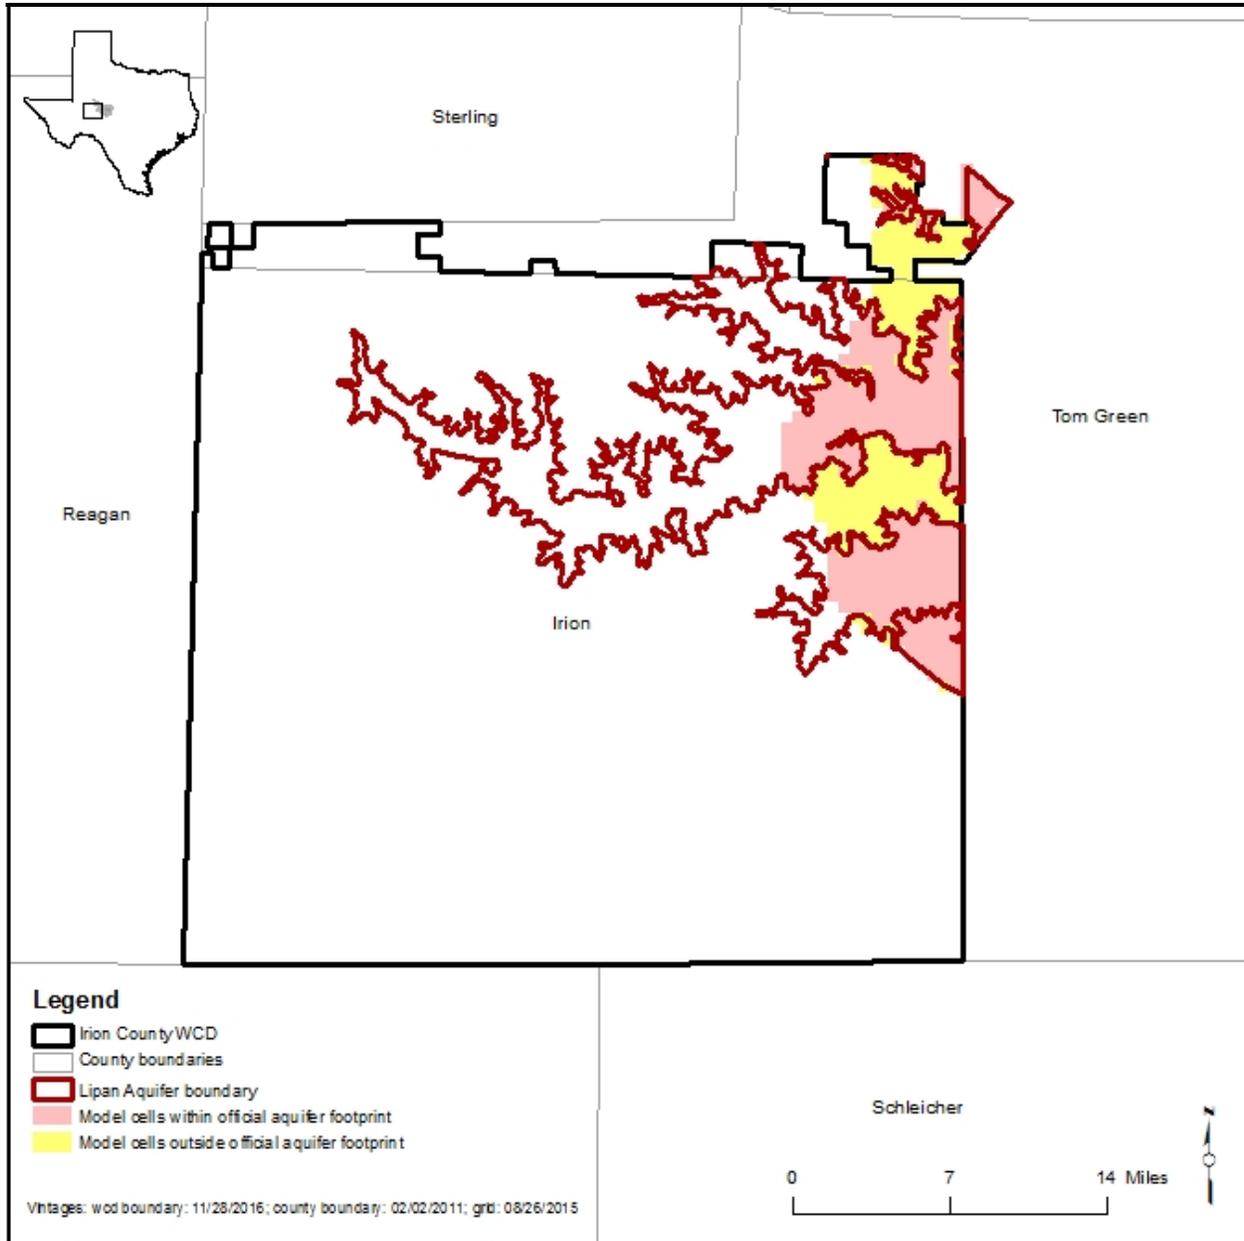

**FIGURE 2: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE LIPAN AQUIFER FROM WHICH THE INFORMATION IN TABLE 2 WAS EXTRACTED (THE AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).**

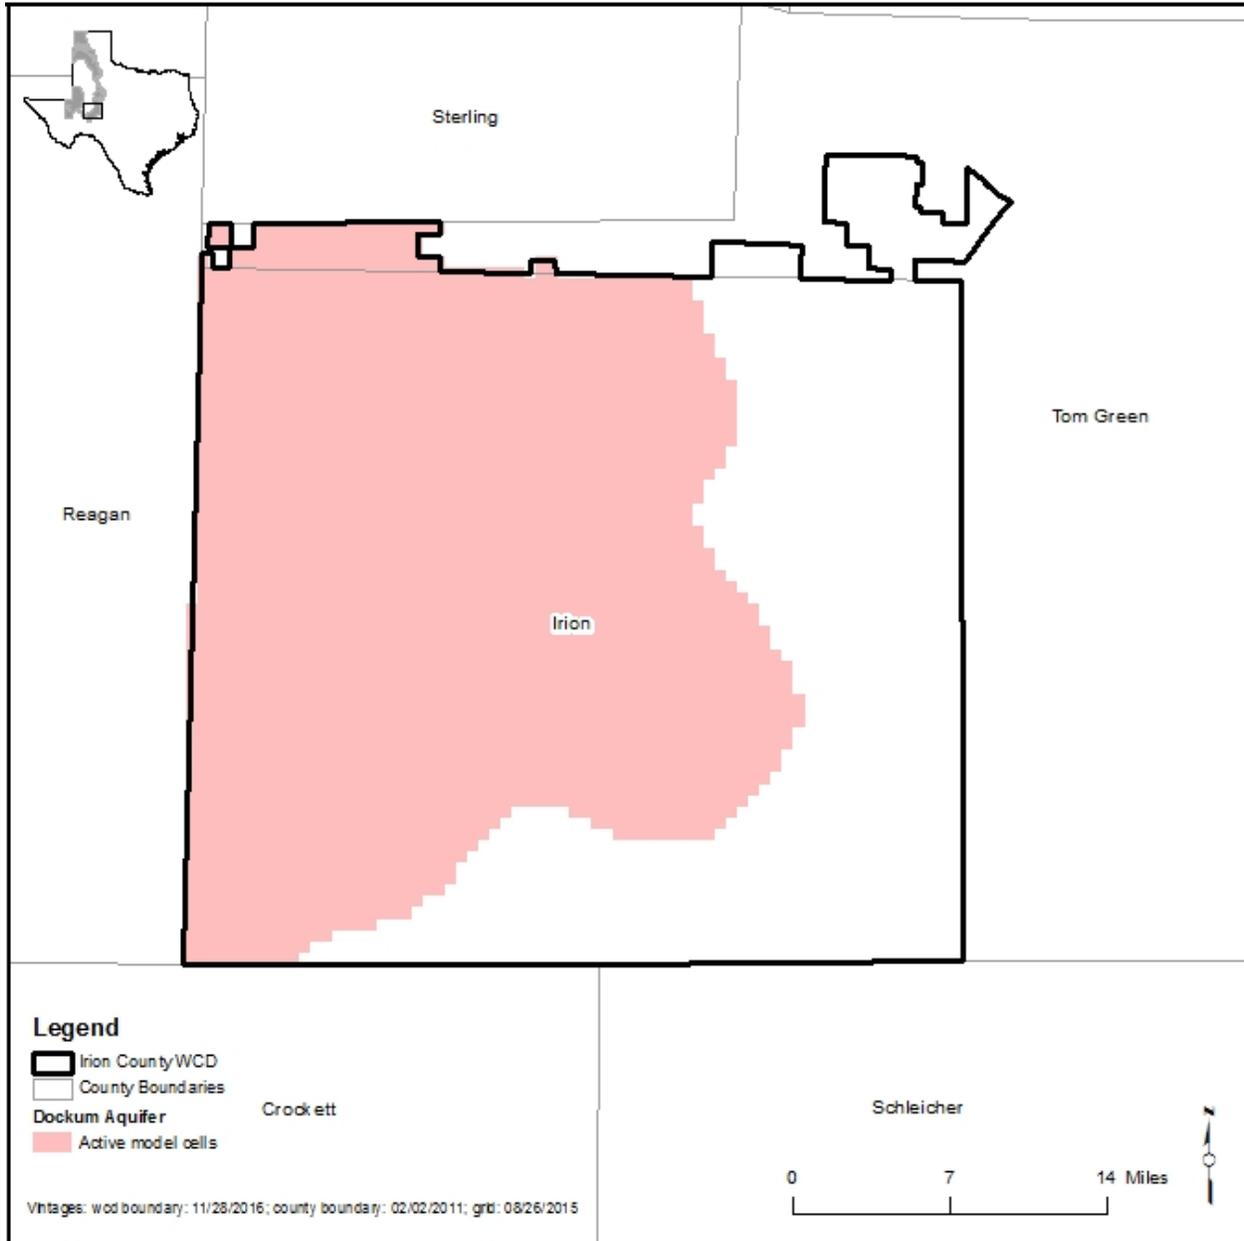

**FIGURE 3: AREA OF THE GROUNDWATER AVAILABILITY MODEL FOR THE DOCKUM AQUIFER FROM WHICH THE INFORMATION IN TABLE 3 WAS EXTRACTED (THE AQUIFER EXTENT WITHIN THE DISTRICT BOUNDARY).**

### *LIMITATIONS:*

The groundwater models used in completing this analysis are the best available scientific tools that can be used to meet the stated objectives. To the extent that this analysis will be used for planning purposes and/or regulatory purposes related to pumping in the past and into the future, it is important to recognize the assumptions and limitations associated with the use of the results. In reviewing the use of models in environmental regulatory decision making, the National Research Council (2007) noted:

*“Models will always be constrained by computational limitations, assumptions, and knowledge gaps. They can best be viewed as tools to help inform decisions rather than as machines to generate truth or make decisions. Scientific advances will never make it possible to build a perfect model that accounts for every aspect of reality or to prove that a given model is correct in all respects for a particular regulatory application. These characteristics make evaluation of a regulatory model more complex than solely a comparison of measurement data with model results.”*

A key aspect of using the groundwater model to evaluate historic groundwater flow conditions includes the assumptions about the location in the aquifer where historic pumping was placed. Understanding the amount and location of historic pumping is as important as evaluating the volume of groundwater flow into and out of the district, between aquifers within the district (as applicable), interactions with surface water (as applicable), recharge to the aquifer system (as applicable), and other metrics that describe the impacts of that pumping. In addition, assumptions regarding precipitation, recharge, and interaction with streams are specific to particular historic time periods.

Because the application of the groundwater models was designed to address regional-scale questions, the results are most effective on a regional scale. The TWDB makes no warranties or representations related to the actual conditions of any aquifer at a particular location or at a particular time.

It is important for groundwater conservation districts to monitor groundwater pumping and overall conditions of the aquifer. Because of the limitations of the groundwater model and the assumptions in this analysis, it is important that the groundwater conservation districts work with the TWDB to refine this analysis in the future given the reality of how the aquifer responds to the actual amount and location of pumping now and in the future. Historic precipitation patterns also need to be placed in context as future climatic conditions, such as dry and wet year precipitation patterns, may differ and affect groundwater flow conditions.

**REFERENCES:**

- Anaya, R., and Jones, I., 2009, Groundwater Availability Model for the Edwards-Trinity (Plateau) and Pecos Valley Aquifers of Texas: Texas Water Development Board Report 373, 103 p., [http://www.twdb.state.tx.us/gam/eddt\\_p/eddt\\_p.htm](http://www.twdb.state.tx.us/gam/eddt_p/eddt_p.htm).
- Beach, J. A., Burton, S., and Kolarik, B., 2004, Groundwater availability model for the Lipan Aquifer in Texas: final report prepared for the Texas Water Development Board by LBG-Guyton Associates, 246 p.,  
<http://www.twdb.texas.gov/groundwater/models/gam/lipn/lipn.asp>
- Deeds, N. E., and Jigmond, M., 2015, Numerical Model Report for the High Plains Aquifer System Groundwater Availability Model: Prepared for the Texas Water Development Board by INTERA Inc., 640 p.  
[http://www.twdb.texas.gov/groundwater/models/gam/hpas/HPAS\\_GAM\\_Numerical\\_Report.pdf](http://www.twdb.texas.gov/groundwater/models/gam/hpas/HPAS_GAM_Numerical_Report.pdf).
- Harbaugh, A. W. and McDonald, M.G., 1996, User's Documentation for MODFLOW-96, an update to the U.S. Geological Survey Modular Finite-Difference Ground-Water Flow Model, U.S. Geological Survey Open-File Report 96-485, 63 p.
- Harbaugh, A. W., 2009, Zonebudget Version 3.01, A computer program for computing subregional water budgets for MODFLOW ground-water flow models, U.S. Geological Survey Groundwater Software.
- Kohlrenken, W., 2012, GAM Run 12-017: Texas Water Development Board, GAM Run 12-017 Report, 6 p., <http://www.twdb.texas.gov/groundwater/docs/GAMruns/GR12-017.pdf>.
- National Research Council, 2007, Models in Environmental Regulatory Decision Making. Committee on Models in the Regulatory Decision Process, National Academies Press, Washington D.C., 287 p.
- Niswonger, R.G., Panday, S., and Ibaraki, M., 2011, MODFLOW-NWT, a Newton formulation for MODFLOW-2005: USGS, Techniques and Methods 6-A37, 44 p.